



Superior Clamping and Gripping



Product Information

Programmable magnetic switches MMS 22-PI1 PI1

MMS 22-PI1

Programmable magnetic switches

Programmable. Precise. Easy assembly.

Programmable magnetic switch MMS 22-PI1

A magnetic switch is used to monitor the status of automation components. They detect the approach of a magnet without contact and above a certain switching value, they put out a digital value. The switching value can be programmed.

Field of application

Used for monitoring gripping and rotary modules, as well as linear modules, and robot accessories. Magnetic switches from SCHUNK detect metals without contact or wear, and are resistant to vibration, dust, and humidity. Magnetic switches are installed in slots and thus do not produce any additional interfering contours. For connection with a digital input module (utilization category DC-12).

Advantages – Your benefits

Individual switching point – without interfering contours

The magnetic switch can be completely inserted, which means that no interfering contours arise due to overhanging sensor systems

Programmable within no time due to non-contact adjustment of the switching points and hysteresis

Adjustable hysteresis for precise position monitoring – even at very low strokes

Suitable for narrow installation spaces due to wired teaching with TeachTool plug

Version with LED display for control of the switching position directly at the sensor

Version with standard plug connector for fast and easy exchangeability of the extension cable

Very flexible cable in PUR version for a long service life

Installation into the sensor groove for space-saving, easy, and fast assembly on the product



Options and special information

High protection class: IP67 when plugged in, for use in clean or dusty environments or in case of contact with water. Operability in case of contact with other media (coolant, acids, bases, etc.) is often given, however cannot be guaranteed by SCHUNK.

Power supply: 10 – 30 V DC at < 10% residual ripple

Sources of interference: Sensors can be influenced by other magnetic fields in the immediate vicinity. Disturbing magnetic fields can be generated by motors, electric welders, permanent magnets or magnetized material (so-called soft magnets) such as hexagon socket wrenches, chips, etc.

Application example



① Actuator

② MMS 22-PI1 C-slot sensor

③ MT magnet teaching tool

SCHUNK offers more ...

The following components make the product MMS 22-PI1 even more productive – the suitable addition for the highest functionality, flexibility, reliability, and controlled production.



Plug teaching tool



Sensor cables



Sensor distributor



SST sensor tester

① For more information on these products can be found on the following product pages or at schunk.com. Please contact us: SCHUNK technical hotline +49-7133-103-2696

MMS 22-PI1 22


Programmable magnetic switches



Technical data


Description		MMS 22-PI1-S-M8-PNP	MMS 22-PI1-S-M8-NPN	MMSK 22-PI1-S-PNP	MMSK 22-PI1-S-NPN
ID		0301160	0301161	0301162	0301163
Principle of function					
Measuring principle		magnetic	magnetic	magnetic	magnetic
Switching function		Closer	Closer	Closer	Closer
Type of switching		PNP	NPN	PNP	NPN
Number of switching points		1	1	1	1
Teach function		yes	yes	yes	yes
General data					
typical switching time	[s]	0.001	0.001	0.001	0.001
Max. switching frequency	[Hz]	1000	1000	1000	1000
Min./max. ambient temperature	[°C]	-10/70	-10/70	-10/70	-10/70
LED display in sensor		yes	yes	yes	yes
Electrical operating data					
Type of voltage		DC	DC	DC	DC
Nominal voltage	[V]	24	24	24	24
Min./max. operating voltage	[V]	10/30	10/30	10/30	10/30
Voltage drop	[V]	1.5	1.5	1.5	1.5
Max. switching current	[A]	0.05	0.05	0.05	0.05
Short circuit protection		yes	yes	yes	yes
Protected against polarity reversal		yes	yes	yes	yes
Mechanical operating data					
Housing material		PA	PA	PA	PA
Cable connector/cable end		M8, 3-pin Male Connector	M8, 3-pin Male Connector	open wire strands	open wire strands
Cable length L	[cm]	30	30	200	200
Cable diameter D	[mm]	2.1	2.1	2.1	2.1
Cable design (wire cross section / number of wires)		3x 0,05mm ²	3x 0,05mm ²	3x 0,05mm ²	3x 0,05mm ²
Cable sheath material		PUR	PUR	PUR	PUR
Min. bending radius (dynamic)	[mm]	21	21	21	21
Min. bending radius (static)	[mm]	10.5	10.5	10.5	10.5
Weight	[kg]	0.01	0.01	0.04	0.04
Protection class IP (sensor, plugged)		67	67	67	67
Protection class		III	III	III	III
Options and their characteristics					
Version with lateral cable outlet		MMS 22-PI1-S-M8-PNP-SA	MMS 22-PI1-S-M8-NPN-SA	MMSK 22-PI1-S-PNP-SA	MMSK 22-PI1-S-NPN-SA
ID		0301166	0301167	0301168	0301169
LED display in sensor		yes	yes	yes	yes
Heavy duty version		MMS 22-PI1-S-M8-PNP-HD	MMS 22-PI1-S-M8-NPN-HD	MMSK 22-PI1-S-PNP-HD	MMSK 22-PI1-S-NPN-HD
ID		0301110	0301111	0301112	0301113
Housing material		stainless steel	stainless steel	stainless steel	stainless steel

MMS(K) 22-PI1 main view

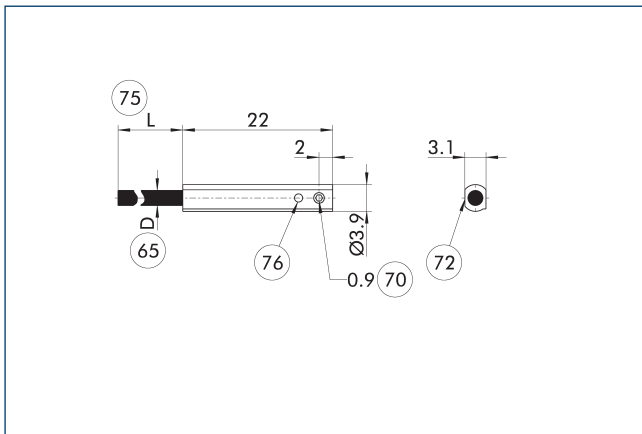


- 65 Cable diameter
- 70 Wrench size
- 72 Active sensor surface
- 75 Cable length
- 76 LED

MMS(K) 22-PI1-SA main view

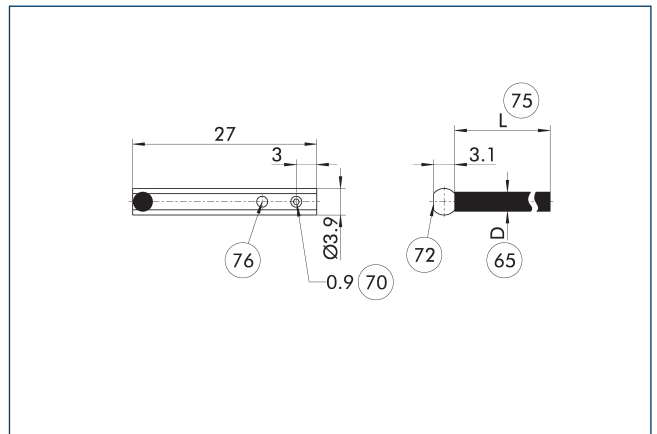


- 65 Cable diameter
- 70 Wrench size
- 72 Active sensor surface
- 75 Cable length
- 76 LED

MMS(K) 22-PI1-HD main view

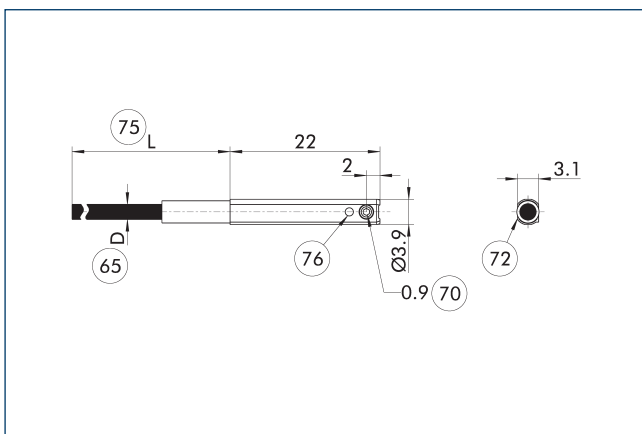


- 65 Cable diameter
- 70 Wrench size
- 72 Active sensor surface
- 75 Cable length
- 76 LED


Wiring diagram closer PNP

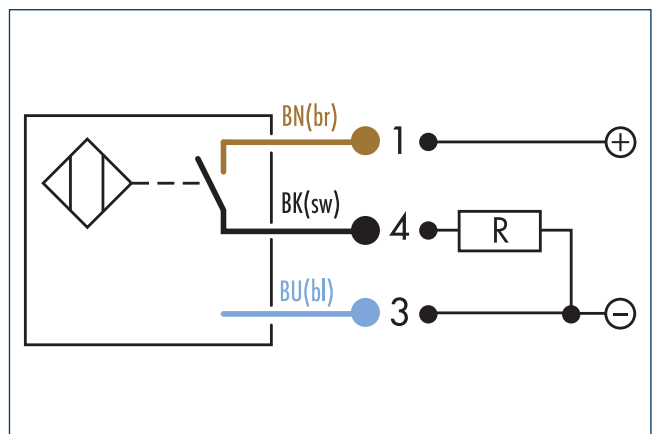

Circuit diagram of NPN closer

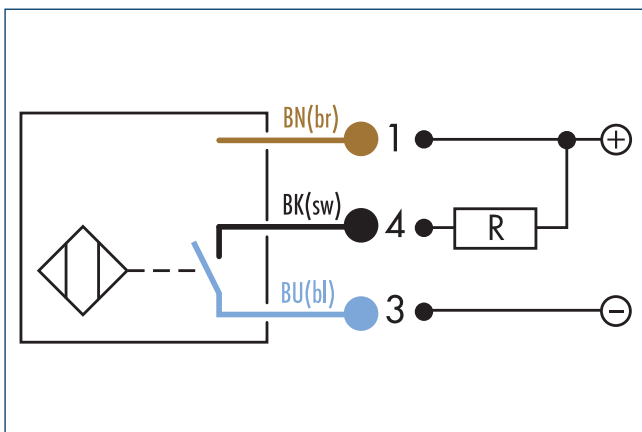

View of M8 connector (3-pin)

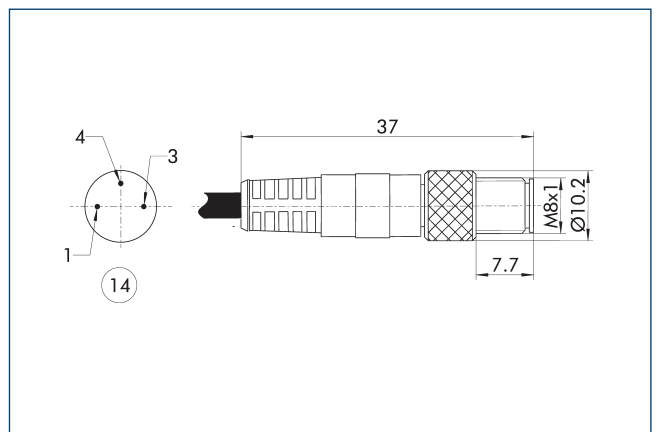


- 14 Connector

This view shows the plug connector on the cable end of the sensor.

MMS 22-PI1 22

Programmable magnetic switches

Connection cables

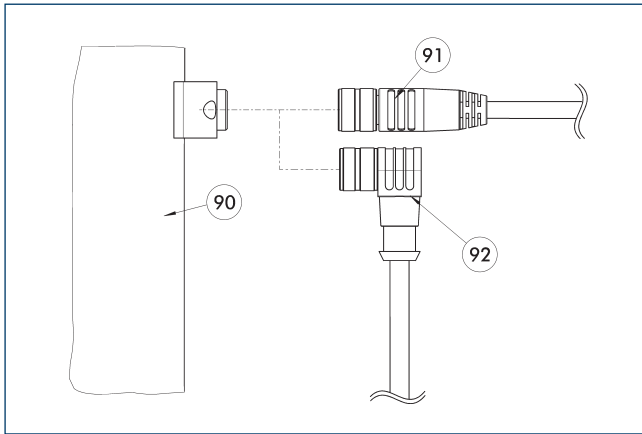


90 Electrical connection component

91 Cable with straight connector
92 Cable with angled connector

Description	ID	Length [m]	Often combined
Connection cables			
KA BG08-L 3P-0300-PNP	0301622	3	●
KA BG08-L 3P-0500-PNP	0301623	5	
KA BW08-L 3P-0300-NPN	0301602	3	
KA BW08-L 3P-0300-PNP	0301594	3	
KA BW08-L 3P-0500-NPN	9641116	5	
KA BW08-L 3P-0500-PNP	0301502	5	
Cable extension			
KV BW08-SG08 3P-0030-PNP	0301495	0.3	
KV BW08-SG08 3P-0100-PNP	0301496	1	
KV BW08-SG08 3P-0200-PNP	0301497	2	●

① BG stands for a connection cable with a straight female connector and BW for an angled female connector. SG stands for a connection cable with a straight male connector and SW for an angled male connector.

clip for plug/socket

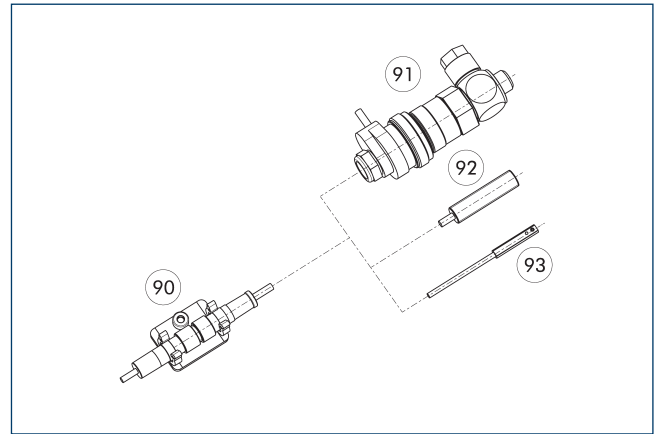


90 CLI plug bracket
91 MV micro valve

92 IN proximity switch
93 MMS magnetic switch

The CLI clip is used for fastening and strain relief for the plug connectors. For example for the sensor and cable extension connection.

Description	ID	
clip for plug/socket		
CLI-M8	0301463	

Pug-in teaching tool ST

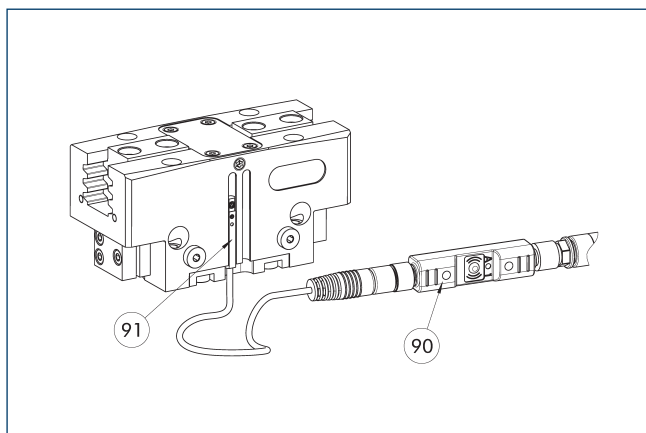

⑩ Pug-in teaching tool ST

⑪ Sensor MMS 22-PI...

In addition to the magnetic teach-in tool included in the scope of delivery, the MMS 22-PI sensors can be taught via the plug teach-in tool. The plug teach in tool is inserted into the wiring from sensor to PLC. This makes teaching in possible even in confined spaces on the sensor. The plug teach in tool differs according to the version of the sensor with regard to switching points (1/2) and switching type (PNP / NPN).

Description	ID	
Plug teaching tool		
ST-MMS 22-PI1-NPN	0301027	
ST-MMS 22-PI1-PNP	0301025	

- ① The plug-in teaching tool is only required for teaching in and can be removed from the cabling again after. The sensor maintains its programming.

SCHUNK GmbH & Co. KG
Spann- und Greiftechnik

Bahnhofstr. 106 - 134
D-74348 Lauffen/Neckar
Tel. +49-7133-103-0
Fax +49-7133-103-2239
info@de.schunk.com
www.schunk.com

Folgen Sie uns



J. Lehmann

Jens Lehmann, German goalkeeper legend, SCHUNK brand ambassador since 2012 for safe, precise gripping and holding.
schunk.com/Lehmann