



Superior Clamping and Gripping



Product Information

Radial gripper DRG

DRG

Radial gripper

Fully encapsulated. Narrower. More flexible

DRG sealed gripper

Sealed 180° angular gripper for the use in contaminated environments

Field of application

For applications requiring a large opening range. Particularly suitable for the use in dirty environments.

Advantages – Your benefits

Completely sealed gripper version allows applications in dirty environments

Air supply via hose-free direct connection or screw connections for flexible pressure supply in all automated systems

Equipped with gripping force maintenance device ensuring that the workpiece stays gripped in case of power drop

Opening angle adjustable from 20° to 180° for a versatile field of applications

Kinematics Slotted link gear for centric gripping with large opening / closing movements



Sizes
Quantity: 5



Weight
0.5 .. 4.46 kg



Gripping moment
8.2 .. 144.4 Nm



Angle per jaw
90°




Workpiece weight
0.9 .. 7.2 kg

Functional description

The round piston is pushed upwards or downwards with compressed air. In the process, the two pins of the slotted link gear move

in unison and relative to the groove in the top jaws. In the gripping moment, these two pins reach the largest lever arm.

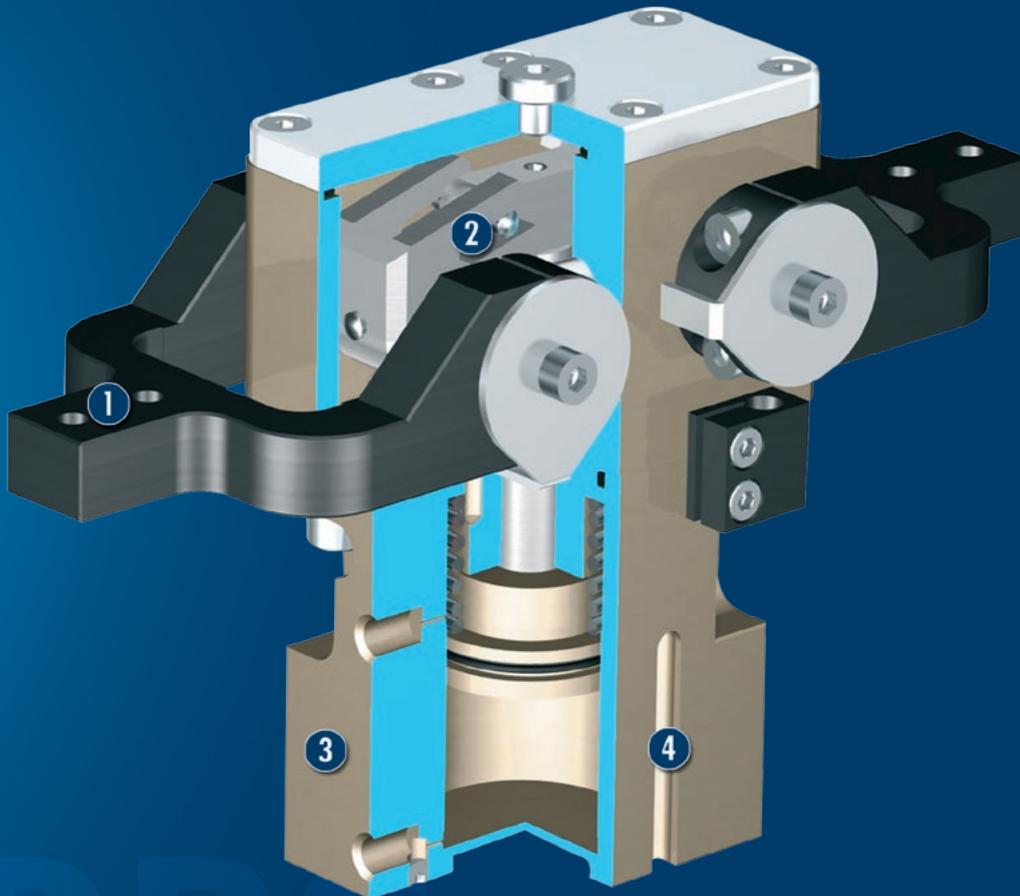

- ① **Base fingers**
for the connection of workpiece-specific gripper fingers
- ② **Kinematics**
Slotted link gear for centric gripping with large opening / closing movements
- ③ **Housing**
Weight-optimized due to the use of high-strength aluminum alloy
- ④ **Position monitoring**
with C-slot switch

CAD data, operating manuals and other current product documents can be found online.

General notes about the series

Operating principle: Wedge-hook kinematics

Housing material: Aluminum alloy, anodized

Base jaw material: Steel

Actuation: pneumatic, with filtered compressed air as per ISO 8573-1:2010 [7:4:4].

Warranty: 24 months

Scope of delivery: Brackets for proximity switches, centering sleeves, O-rings for direct connection, deaeration controls, assembly and operating manual with manufacturer's declaration

Gripping moment: gripping moment is the arithmetic total of gripping moments for each gripper jaw.

Finger length: is measured from the reference surface as the distance P in direction to the main axis.

Repeat accuracy: is defined as the spread of the end position during 100 consecutive strokes.

Workpiece weight: is calculated for force-fit gripping with a coefficient of static friction of 0.1 and a safety factor of 2 against workpiece slippage at acceleration due to gravity g. For form-fit or capture gripping, there are significantly higher permissible workpiece weights.

Closing and opening times: are purely the times that the base jaws or fingers are in motion. Valve switching times, hose filling times, or PLC reaction times are not a part of this and are to be considered when cycle times are calculated.

Application example

Stroke gripper unit for removing workpieces from a pallet system

- 1 DRG sealed 2-finger radial gripper
- 2 Stroke module LDK



SCHUNK offers more ...

The following components make the product DRG even more productive – the suitable addition for the highest functionality, flexibility, reliability, and controlled production.



Pressure maintenance valve



Inductive Proximity Switches

① Additional information regarding the products can be found on the following product pages or at www.schunk.com. Please contact us for further information: SCHUNK technical hotline +49-7133-103-2696

Options and special information

Gripping force maintenance version AS / IS: The mechanical gripping force maintenance version ensures a minimum gripping force also in the case of a drop in pressure. In the AS / S version this has the effect of a closing force, in the IS version of an opening force

High-temperature version VHT: for use in hot environments

180°-angular grippers (radial grippers) are advantageous in order to avoid additional stroke motions. Since every jaw swivels away by 90°, the gripper is outside of the working area, and a stroke motion back of the whole gripper is no more necessary.


Additional versions: Various options can be combined with each other. Numerous additional options are also available – just tell us what your task is!

DRG 44


Radial gripper




Gripping force, O.D. gripping

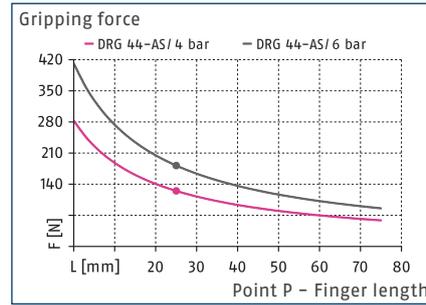

Closing torque curve**

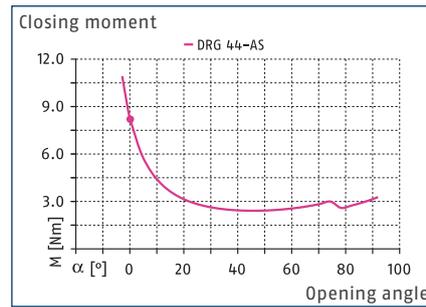

Finger load

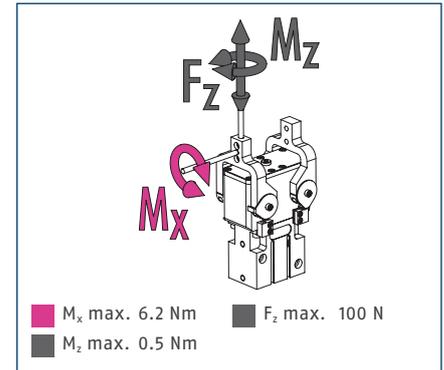

① The indicated torques and forces are static values, apply for each base jaw, and may occur simultaneously.


Technical data

Description		DRG 44-90-AS
ID		0307106
Opening angle per jaw	[°]	90
Closed angle per jaw up to	[°]	1.5
Closing moment	[Nm]	8.2
Closing moment generated by spring	[Nm]	1.8
Weight	[kg]	0.5
Recommended workpiece weight	[kg]	0.9
Fluid consumption double stroke	[cm ³]	16
Min./max. operating pressure	[bar]	4/6.5
Nominal operating pressure	[bar]	6
Closing/opening time	[s]	0.4/0.5
Closing time with spring only	[s]	0.45
Max. permissible finger length	[mm]	50
Max. permissible mass per finger	[kg]	0.09
Protection class IP		67
Min./max. ambient temperature	[°C]	5/90
Repeat accuracy	[mm]	0.1
Options and their characteristics		
High-temperature version		39307106
Min./max. ambient temperature	[°C]	5/130

① The opening angle of the base jaws can be limited.

**The diagramm is valid for all opening angle variants.

Main view

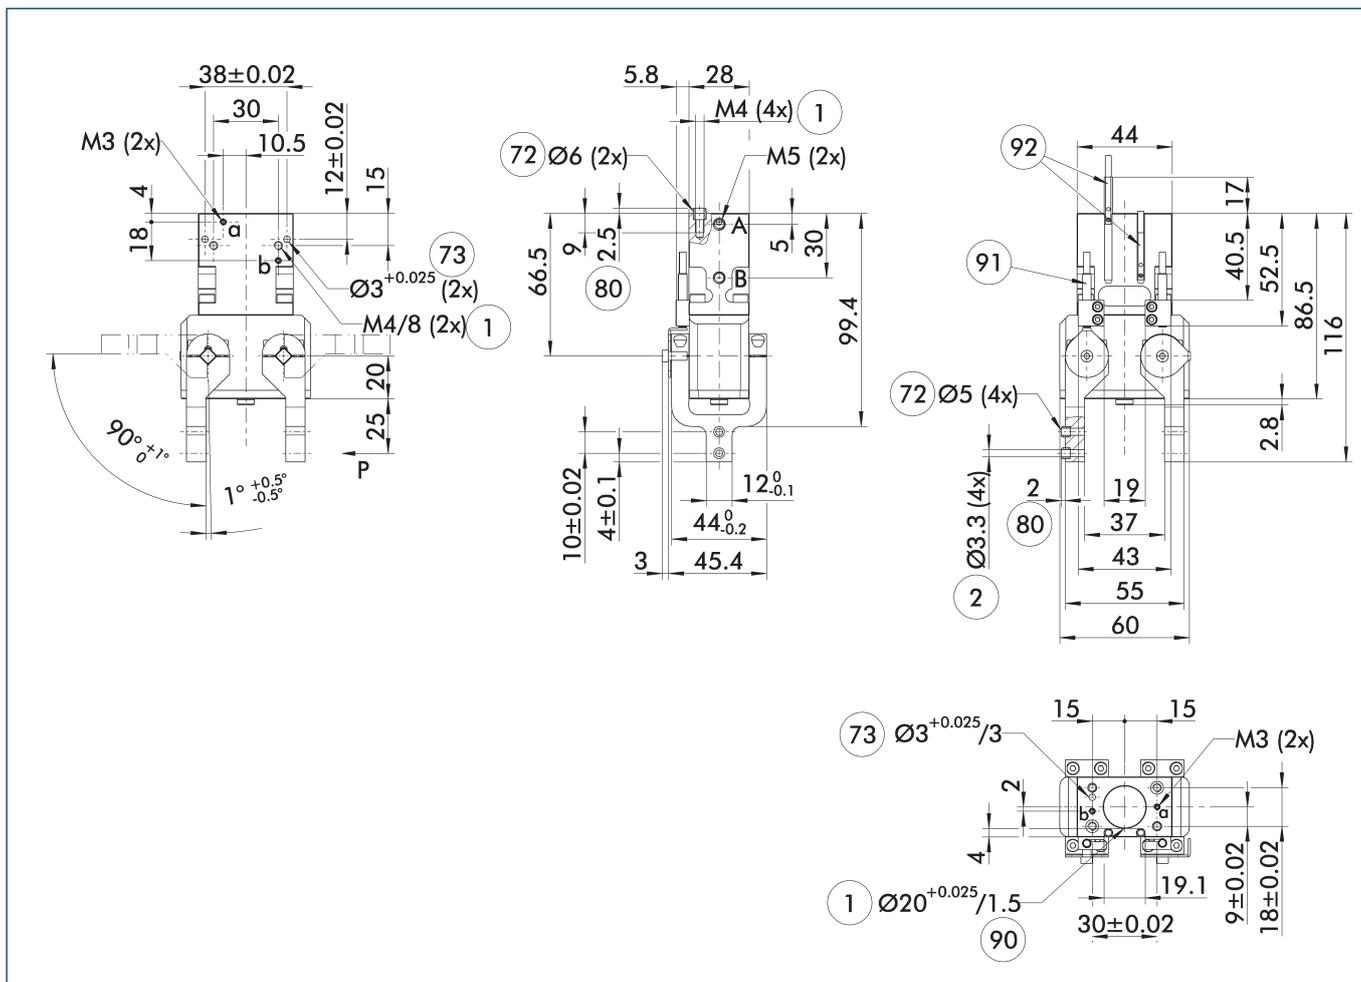

The drawing shows the gripper in the basic version with closed jaws, without dimensional consideration of the options described below.

① The SDV-P pressure maintenance valve can be used as a gripping force maintenance device (see catalog section on accessories).

A, a Main / direct connection, gripper opening

B, b Main / direct connection, gripper closing

① Gripper connection

② Finger connection

⑦② Fit for centering sleeves

⑦③ Fit for centering pins

⑧① Depth of the centering sleeve hole in the counter part

⑧② Depth of centering collar



⑧① Sensor IN ...

⑧② Sensor MMS 22..

DRG 44

Radial gripper


Maximum permitted finger projection

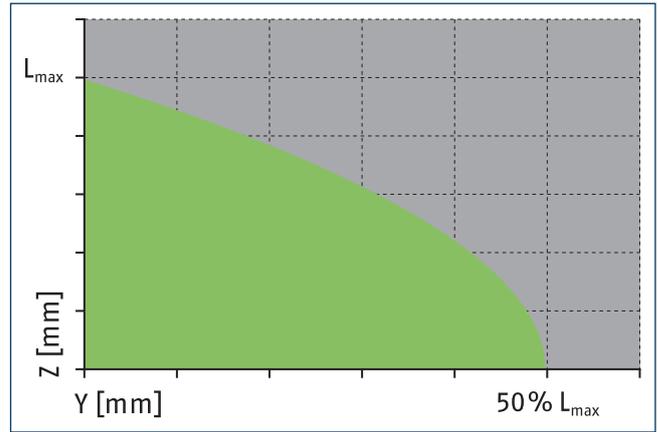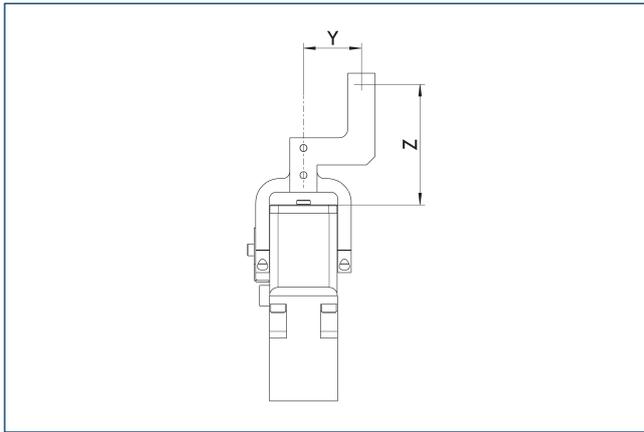

■ Permitted range ■ Inadmissible range

L_{max} is equivalent to the maximum permitted finger length, see the technical data table

Hose-free direct connection M3

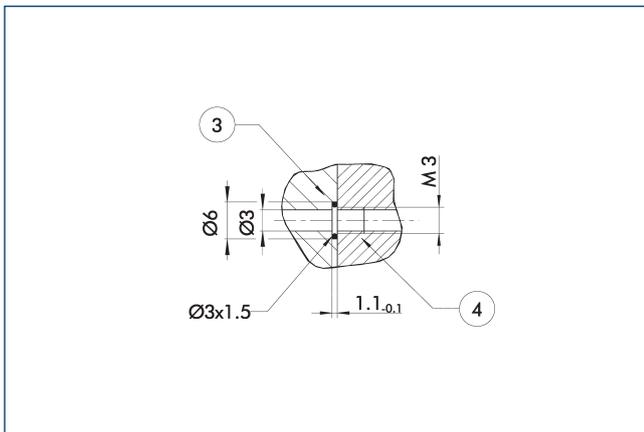


③ Adapter

④ Grippers

The direct connection is used for supplying compressed air without hoses. Instead, the pressure medium is fed through bore-holes in the mounting plate.

SDV-P pressure maintenance valve

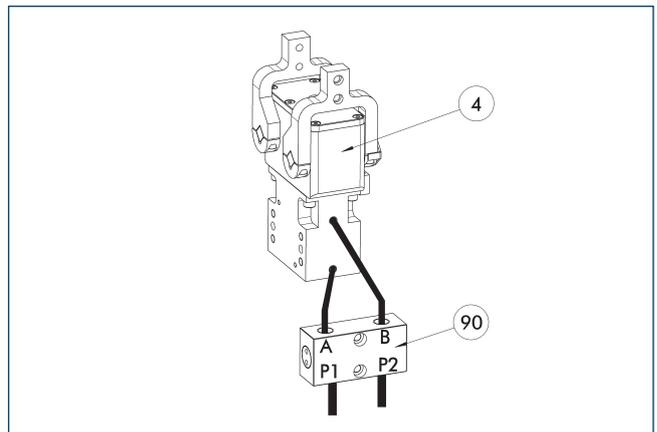


④ Grippers

90 SDV-P pressure maintenance valve

The SDV-P pressure maintenance valve ensures in emergency STOP situations that the pressure in the piston chamber of pneumatic gripper, swivel, linear, and quick-change modules is temporarily maintained.

Description	ID
Pressure maintenance valve	
SDV-P 04	0403130
Pressure maintenance valve with air bleed screw	
SDV-P 04-E	0300120

Attachment kit for proximity switch

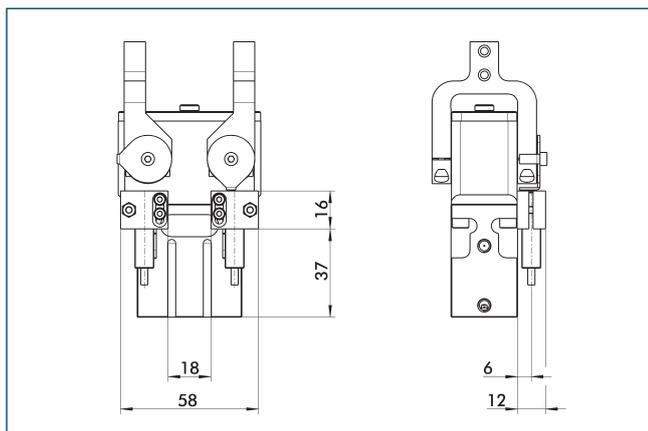


The attachment kit consists of brackets and the appropriate fastening materials. The proximity switches must be ordered separately.

Description	ID
Attachment kit for proximity switch	
AS-DRG-44-80	0304131

① This attachment kit needs to be ordered optionally as an accessory.

Inductive Proximity Switches

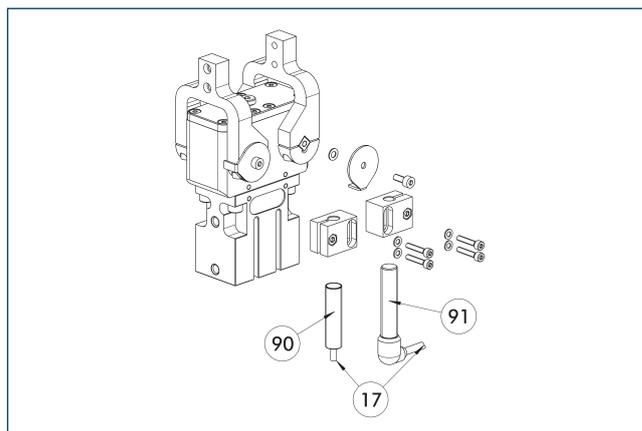


- ①7 Cable outlet
- ①90 Sensor IN ...
- ①91 Sensor IN...-SA

End position monitoring can be mounted with an attachment kit.

Description	ID	Often combined
Attachment kit for proximity switch		
AS-DRG-44-80	0304131	
Inductive Proximity Switches		
IN 80-S-M12	0301578	
IN 80-S-M8	0301478	●
INK 80-S	0301550	
Inductive proximity switch with lateral outlet		
IN 80-S-M12-SA	0301587	
IN 80-S-M8-SA	0301483	●
INK 80-S-SA	0301566	

① Two sensors (closer/S) are required for each unit and extension cables are available as an option. This attachment kit needs to be ordered optionally as an accessory. For sensor cables, note the minimum permissible bending radii. These are generally 35 mm.

Inductive Proximity Switches

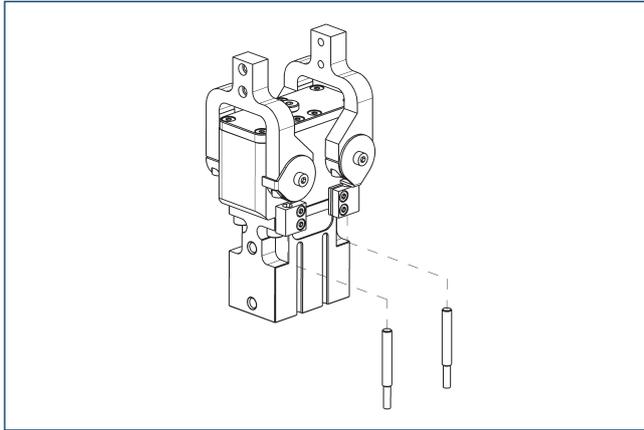


Directly mounted end position monitoring.

Description	ID	Often combined
Inductive Proximity Switches		
IN 40-S-M12	0301574	
IN 40-S-M8	0301474	●
INK 40-S	0301555	
Cable extension		
KV BG12-SG12 3P-0030-PNP	0301999	
KV BG12-SG12 3P-0060-PNP	0301998	
KV BW08-SG08 3P-0030-PNP	0301495	
KV BW08-SG08 3P-0100-PNP	0301496	
KV BW08-SG08 3P-0200-PNP	0301497	●
KV BW12-SG12 3P-0030-PNP	0301595	
KV BW12-SG12 3P-0100-PNP	0301596	
KV BW12-SG12 3P-0200-PNP	0301597	
clip for plug/socket		
CLI-M12	0301464	
CLI-M8	0301463	
Connection cables		
KA BG08-L 3P-0300-PNP	0301622	●
KA BG08-L 3P-0500-PNP	0301623	
KA BG12-L 3P-0500-PNP	30016369	
KA BW08-L 3P-0300-PNP	0301594	
KA BW08-L 3P-0500-PNP	0301502	
KA BW12-L 3P-0300-PNP	0301503	
KA BW12-L 3P-0500-PNP	0301507	
Sensor distributor		
V2-M12	0301776	●
V2-M8	0301775	●
V4-M12	0301747	
V4-M8	0301746	
V8-M12	0301752	
V8-M8	0301751	

- ① Two sensors (closer/S) are required for each unit and extension cables are available as an option. For sensor cables, note the minimum permissible bending radii. These are generally 35 mm.

Electronic magnetic switches MMS

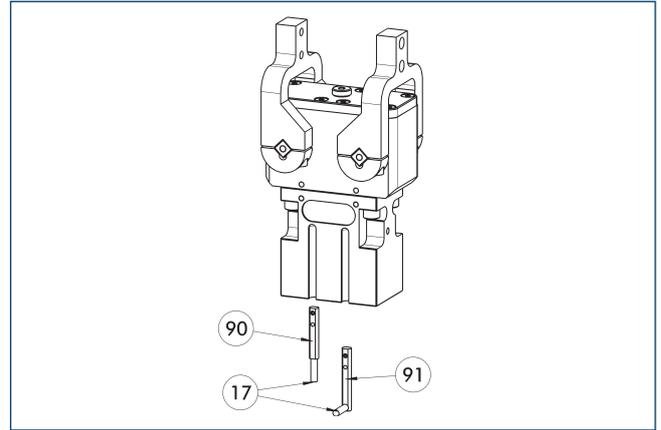

①7 Cable outlet

①0 Sensor MMS 22..

①1 Sensor MMS 22...-SA


End position monitoring for mounting in the C-slot.

Description	ID	Often combined
Electronic magnetic switches MMS		
MMS 22-S-M8-PNP	0301032	●
MMSK 22-S-PNP	0301034	
MMS electronic magnetic switches with lateral outlet		
MMS 22-S-M8-PNP-SA	0301042	●
MMSK 22-S-PNP-SA	0301044	
Cable extension		
KV BW08-SG08 3P-0030-PNP	0301495	
KV BW08-SG08 3P-0100-PNP	0301496	
KV BW08-SG08 3P-0200-PNP	0301497	●
clip for plug/socket		
CLI-M8	0301463	
Connection cables		
KA BG08-L 3P-0300-PNP	0301622	●
KA BG08-L 3P-0500-PNP	0301623	
KA BW08-L 3P-0300-PNP	0301594	
KA BW08-L 3P-0500-PNP	0301502	
Sensor distributor		
V2-M8	0301775	●
V4-M8	0301746	
V8-M8	0301751	


- ① Two sensors (closer/S) are required for each unit and extension cables are available as an option. For sensor cables, note the minimum permissible bending radii. These are generally 35 mm.




Gripping force, O.D. gripping

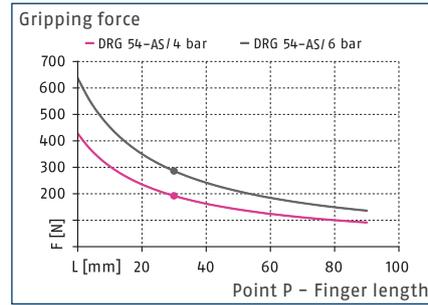

Closing torque curve**

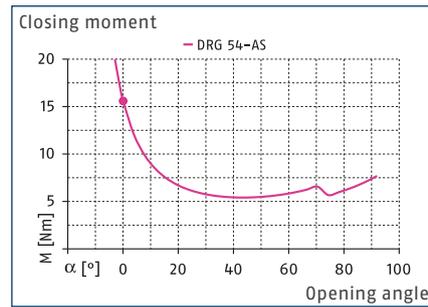

Finger load

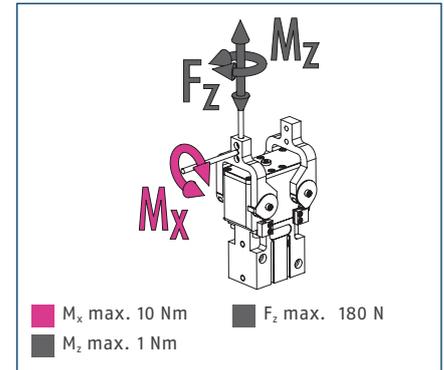

① The indicated torques and forces are static values, apply for each base jaw, and may occur simultaneously.


Technical data

Description		DRG 54-90-AS
ID		0307107
Opening angle per jaw	[°]	90
Closed angle per jaw up to	[°]	1.5
Closing moment	[Nm]	15.6
Closing moment generated by spring	[Nm]	2.8
Weight	[kg]	0.77
Recommended workpiece weight	[kg]	1.5
Fluid consumption double stroke	[cm ³]	36
Min./max. operating pressure	[bar]	4/6.5
Nominal operating pressure	[bar]	6
Closing/opening time	[s]	0.4/0.5
Closing time with spring only	[s]	0.60
Max. permissible finger length	[mm]	60
Max. permissible mass per finger	[kg]	0.15
Protection class IP		67
Min./max. ambient temperature	[°C]	5/90
Repeat accuracy	[mm]	0.1
Options and their characteristics		
High-temperature version		39307107
Min./max. ambient temperature	[°C]	5/130

① The opening angle of the base jaws can be limited.

**The diagramm is valid for all opening angle variants.

Main view

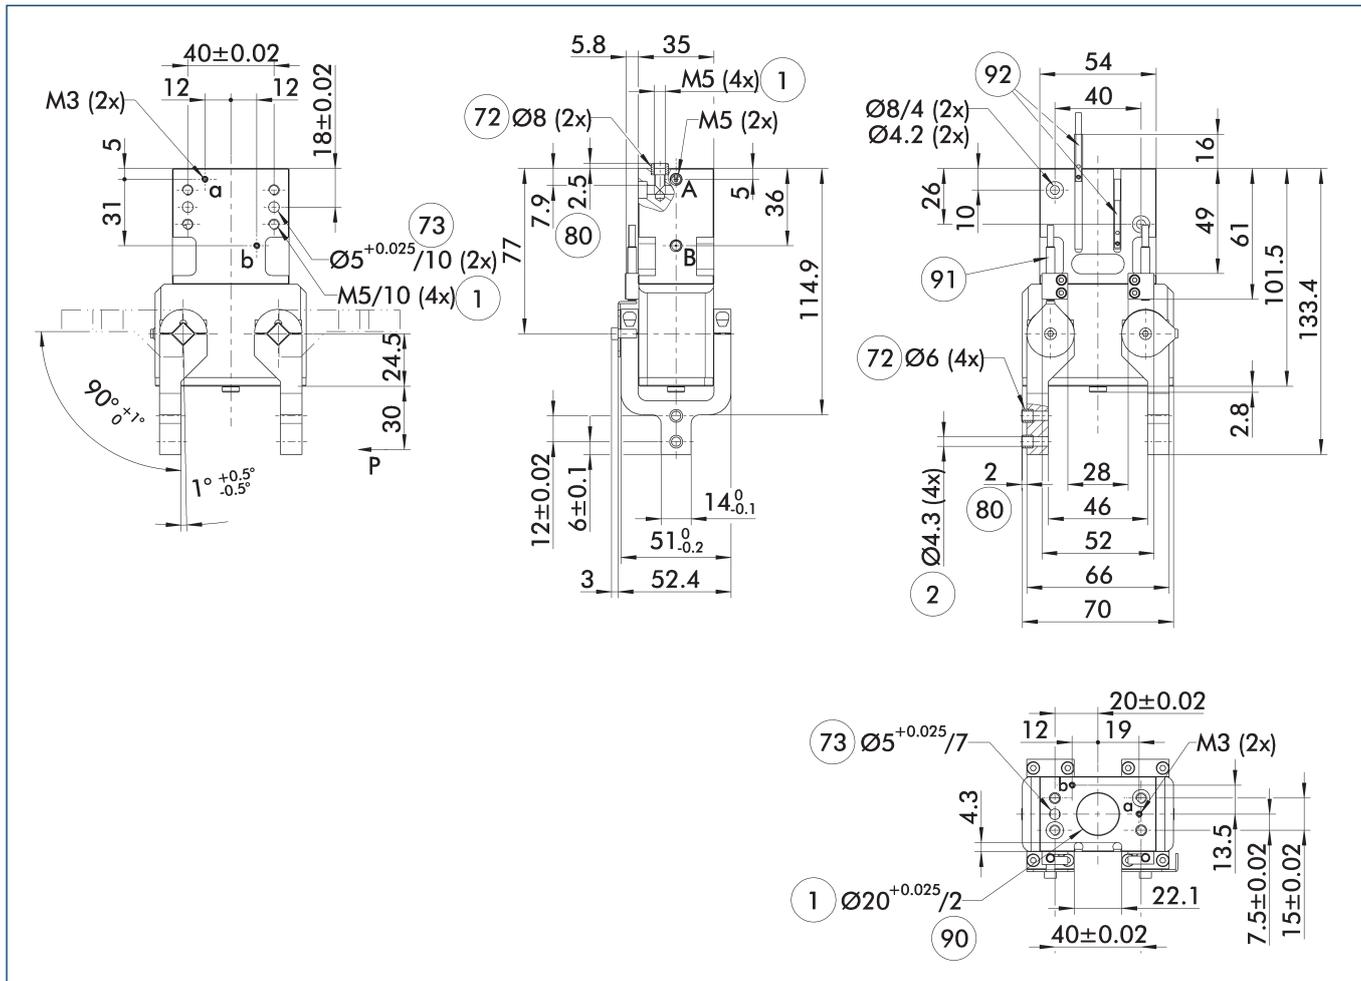

The drawing shows the gripper in the basic version with closed jaws, without dimensional consideration of the options described below.

① The SDV-P pressure maintenance valve can be used as a gripping force maintenance device (see catalog section on accessories).

A, a Main / direct connection, gripper opening

B, b Main / direct connection, gripper closing

① Gripper connection

② Finger connection

⑦ Fit for centering sleeves

⑦ Fit for centering pins



⑧ Depth of the centering sleeve hole in the counter part

⑨ Depth of centering collar

⑩ Sensor IN ...

⑪ Sensor MMS 22..


Maximum permitted finger projection

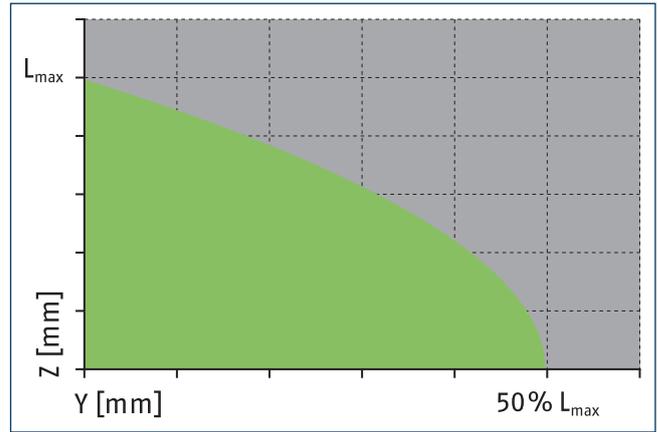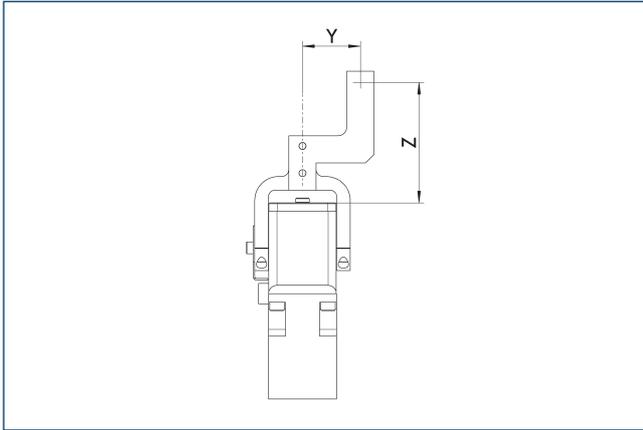

■ Permitted range ■ Inadmissible range

L_{max} is equivalent to the maximum permitted finger length, see the technical data table

Hose-free direct connection M3

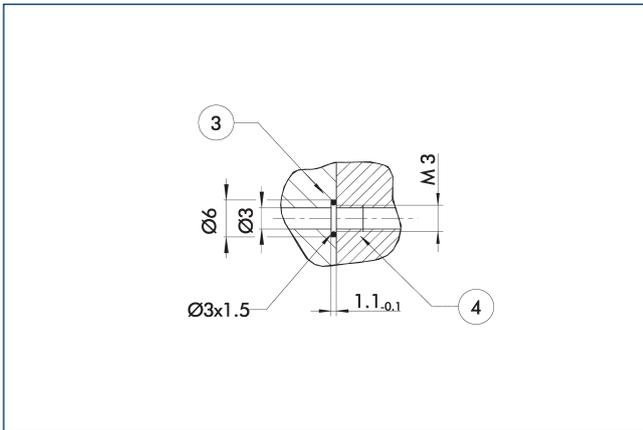


③ Adapter

④ Grippers

The direct connection is used for supplying compressed air without hoses. Instead, the pressure medium is fed through bore-holes in the mounting plate.

SDV-P pressure maintenance valve

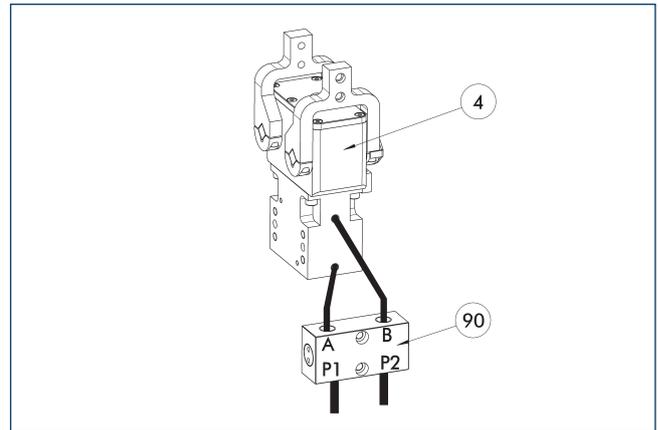


④ Grippers

90 SDV-P pressure maintenance valve

The SDV-P pressure maintenance valve ensures in emergency STOP situations that the pressure in the piston chamber of pneumatic gripper, swivel, linear, and quick-change modules is temporarily maintained.

Description	ID
Pressure maintenance valve	
SDV-P 04	0403130
Pressure maintenance valve with air bleed screw	
SDV-P 04-E	0300120

Attachment kit for proximity switch

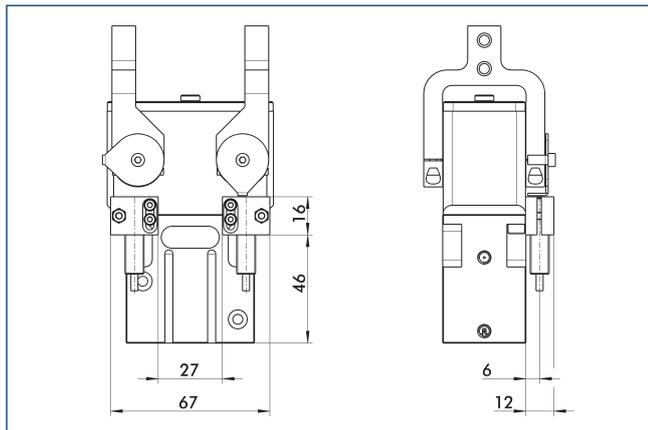


End position monitoring can be mounted with an attachment kit.

Description	ID
Attachment kit for proximity switch	
AS-DRG-44-80	0304131

ⓘ This attachment kit needs to be ordered optionally as an accessory.

Inductive Proximity Switches

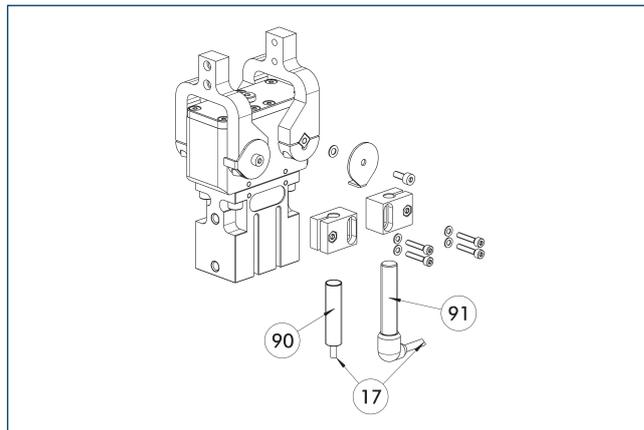


- Ⓐ Cable outlet
- Ⓓ Sensor IN...-SA
- Ⓒ Sensor IN ...

End position monitoring can be mounted with an attachment kit.

Description	ID	Often combined
Attachment kit for proximity switch		
AS-DRG-44-80	0304131	
Inductive Proximity Switches		
IN 80-S-M12	0301578	
IN 80-S-M8	0301478	●
INK 80-S	0301550	
Inductive proximity switch with lateral outlet		
IN 80-S-M12-SA	0301587	
IN 80-S-M8-SA	0301483	●
INK 80-S-SA	0301566	

ⓘ Two sensors (closer/S) are required for each unit and extension cables are available as an option. This attachment kit needs to be ordered optionally as an accessory. For sensor cables, note the minimum permissible bending radii. These are generally 35 mm.

Inductive Proximity Switches

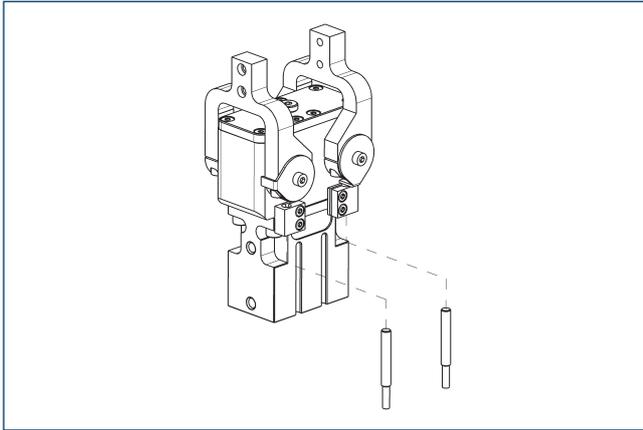


Directly mounted end position monitoring.

Description	ID	Often combined
Inductive Proximity Switches		
IN 40-S-M12	0301574	
IN 40-S-M8	0301474	●
INK 40-S	0301555	
Cable extension		
KV BG12-SG12 3P-0030-PNP	0301999	
KV BG12-SG12 3P-0060-PNP	0301998	
KV BW08-SG08 3P-0030-PNP	0301495	
KV BW08-SG08 3P-0100-PNP	0301496	
KV BW08-SG08 3P-0200-PNP	0301497	●
KV BW12-SG12 3P-0030-PNP	0301595	
KV BW12-SG12 3P-0100-PNP	0301596	
KV BW12-SG12 3P-0200-PNP	0301597	
clip for plug/socket		
CLI-M12	0301464	
CLI-M8	0301463	
Connection cables		
KA BG08-L 3P-0300-PNP	0301622	●
KA BG08-L 3P-0500-PNP	0301623	
KA BG12-L 3P-0500-PNP	30016369	
KA BW08-L 3P-0300-PNP	0301594	
KA BW08-L 3P-0500-PNP	0301502	
KA BW12-L 3P-0300-PNP	0301503	
KA BW12-L 3P-0500-PNP	0301507	
Sensor distributor		
V2-M12	0301776	●
V2-M8	0301775	●
V4-M12	0301747	
V4-M8	0301746	
V8-M12	0301752	
V8-M8	0301751	

① Two sensors (closer/S) are required for each unit and extension cables are available as an option. For sensor cables, note the minimum permissible bending radii. These are generally 35 mm.

Electronic magnetic switches MMS

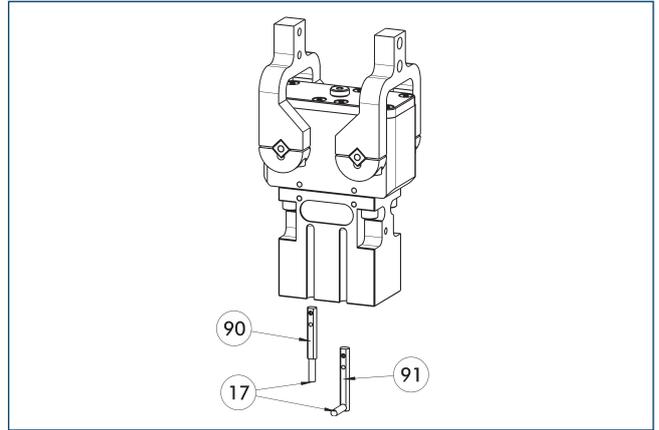

①7 Cable outlet

①90 Sensor MMS 22..

①91 Sensor MMS 22...-SA

End position monitoring for mounting in the C-slot.

Description	ID	Often combined
Electronic magnetic switches MMS		
MMS 22-S-M8-PNP	0301032	●
MMSK 22-S-PNP	0301034	
MMS electronic magnetic switches with lateral outlet		
MMS 22-S-M8-PNP-SA	0301042	●
MMSK 22-S-PNP-SA	0301044	
Cable extension		
KV BW08-SG08 3P-0030-PNP	0301495	
KV BW08-SG08 3P-0100-PNP	0301496	
KV BW08-SG08 3P-0200-PNP	0301497	●
clip for plug/socket		
CLI-M8	0301463	
Connection cables		
KA BG08-L 3P-0300-PNP	0301622	●
KA BG08-L 3P-0500-PNP	0301623	
KA BW08-L 3P-0300-PNP	0301594	
KA BW08-L 3P-0500-PNP	0301502	
Sensor distributor		
V2-M8	0301775	●
V4-M8	0301746	
V8-M8	0301751	


① Two sensors (closer/S) are required for each unit and extension cables are available as an option. For sensor cables, note the minimum permissible bending radii. These are generally 35 mm.

DRG 64


Radial gripper




Gripping force, O.D. gripping

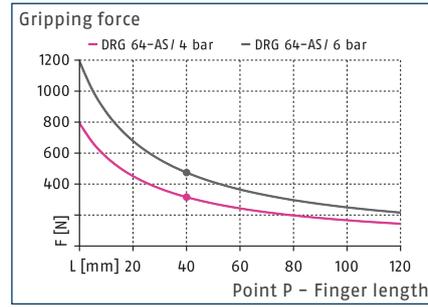

Closing torque curve**

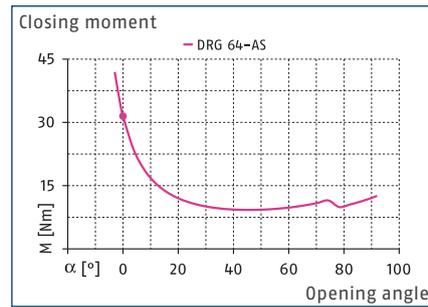

Finger load

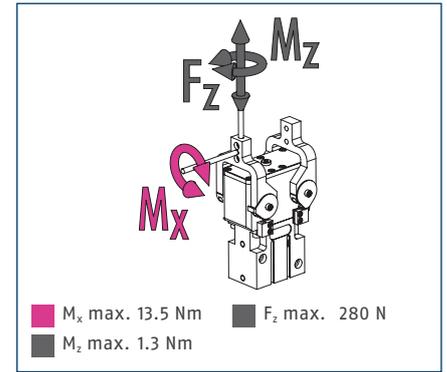

① The indicated torques and forces are static values, apply for each base jaw, and may occur simultaneously.


Technical data

Description		DRG 64-90-AS
ID		0307108
Opening angle per jaw	[°]	90
Closed angle per jaw up to	[°]	1.5
Closing moment	[Nm]	31.5
Closing moment generated by spring	[Nm]	5.1
Weight	[kg]	1.15
Recommended workpiece weight	[kg]	2.4
Fluid consumption double stroke	[cm ³]	57
Min./max. operating pressure	[bar]	4/6.5
Nominal operating pressure	[bar]	6
Closing/opening time	[s]	0.4/0.8
Closing time with spring only	[s]	0.60
Max. permissible finger length	[mm]	80
Max. permissible mass per finger	[kg]	0.26
Protection class IP		67
Min./max. ambient temperature	[°C]	5/90
Repeat accuracy	[mm]	0.1
Options and their characteristics		
High-temperature version		39307108
Min./max. ambient temperature	[°C]	5/130

① The opening angle of the base jaws can be limited.

**The diagramm is valid for all opening angle variants.

Main view

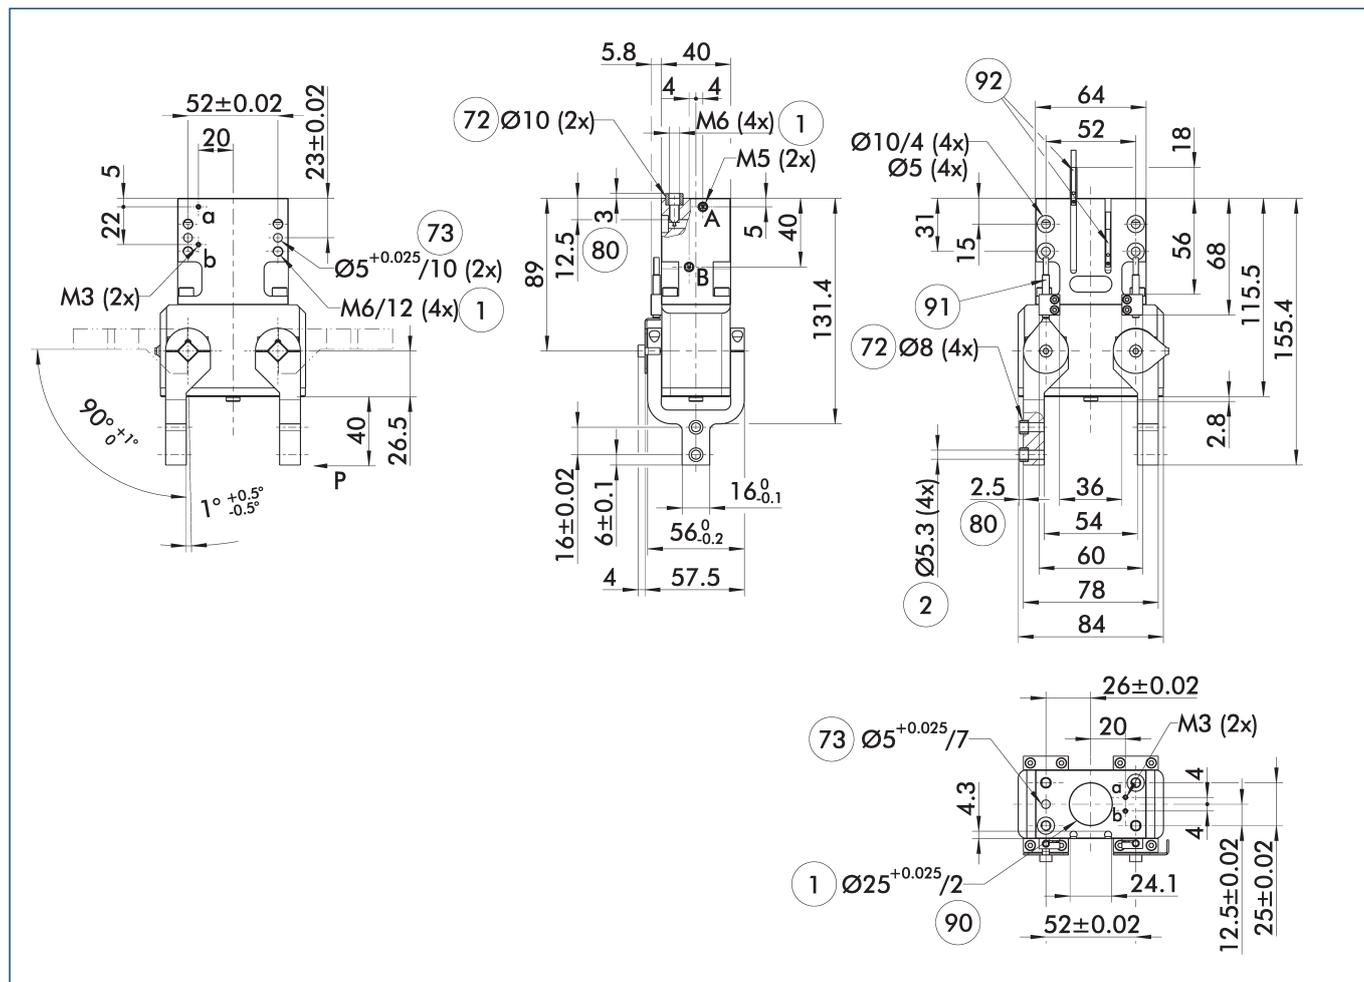

The drawing shows the gripper in the basic version with closed jaws, without dimensional consideration of the options described below.

① The SDV-P pressure maintenance valve can be used as a gripping force maintenance device (see catalog section on accessories).

A, a Main / direct connection, gripper opening

B, b Main / direct connection, gripper closing

① Gripper connection

② Finger connection

⑦2 Fit for centering sleeves

⑦3 Fit for centering pins

⑧0 Depth of the centering sleeve hole in the counter part

⑨0 Depth of centering collar



⑨1 Sensor IN ...

⑨2 Sensor MMS 22..

DRG 64

Radial gripper


Maximum permitted finger projection

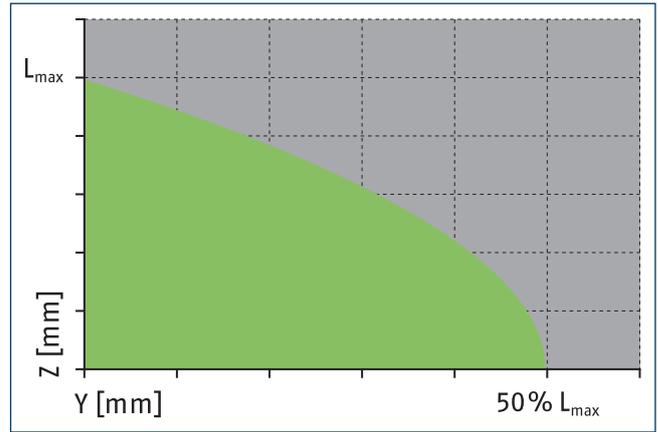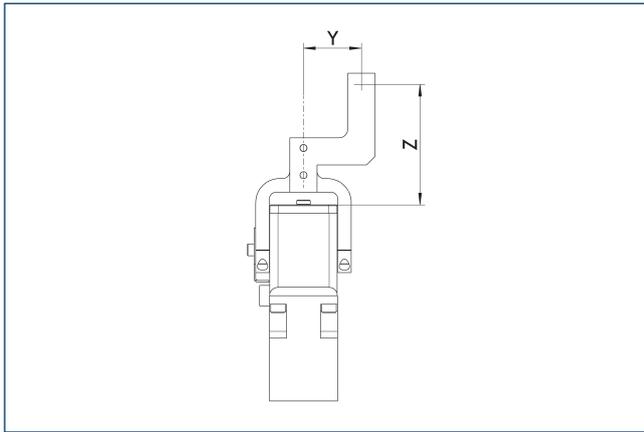

■ Permitted range ■ Inadmissible range

L_{max} is equivalent to the maximum permitted finger length, see the technical data table

Hose-free direct connection M3

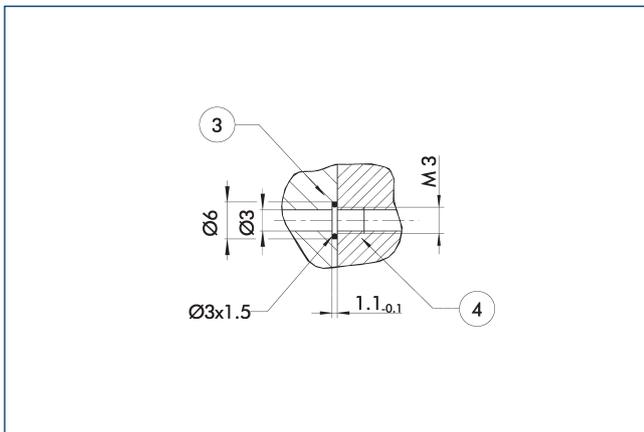


③ Adapter

④ Grippers

The direct connection is used for supplying compressed air without hoses. Instead, the pressure medium is fed through bore-holes in the mounting plate.

SDV-P pressure maintenance valve

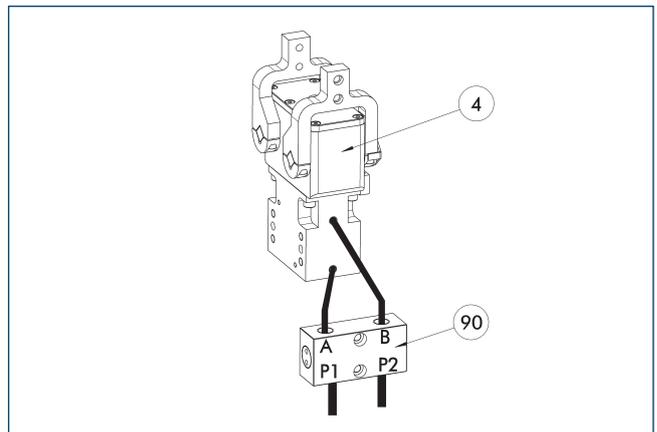


④ Grippers

⑨⑩ SDV-P pressure maintenance valve

The SDV-P pressure maintenance valve ensures in emergency STOP situations that the pressure in the piston chamber of pneumatic gripper, swivel, linear, and quick-change modules is temporarily maintained.

Description	ID
Pressure maintenance valve	
SDV-P 04	0403130
Pressure maintenance valve with air bleed screw	
SDV-P 04-E	0300120

Attachment kit for proximity switch

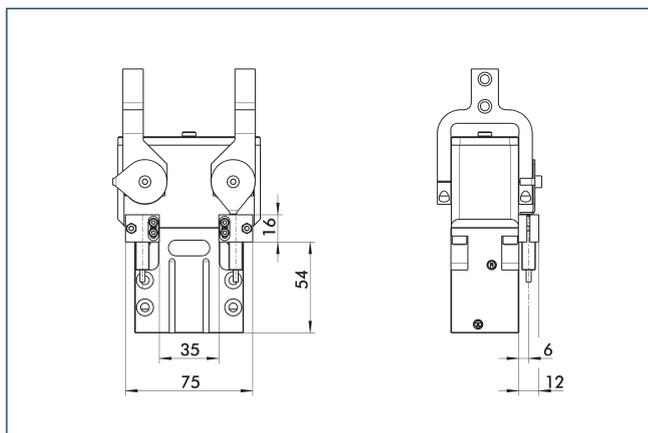


The attachment kit consists of brackets and the appropriate fastening materials. The proximity switches must be ordered separately.

Description	ID
Attachment kit for proximity switch	
AS-DRG-44-80	0304131

① This attachment kit needs to be ordered optionally as an accessory.

Inductive Proximity Switches

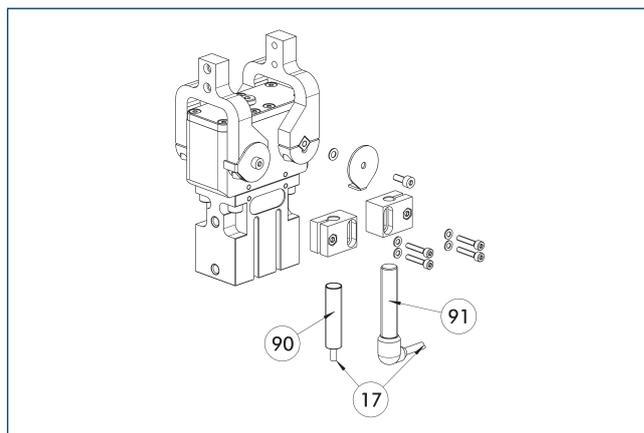


- ①⑦ Cable outlet
- ①⑨ Sensor IN ...
- ①⑨ Sensor IN...-SA

End position monitoring can be mounted with an attachment kit.

Description	ID	Often combined
Attachment kit for proximity switch		
AS-DRG-44-80	0304131	
Inductive Proximity Switches		
IN 80-S-M12	0301578	
IN 80-S-M8	0301478	●
INK 80-S	0301550	
Inductive proximity switch with lateral outlet		
IN 80-S-M12-SA	0301587	
IN 80-S-M8-SA	0301483	●
INK 80-S-SA	0301566	

① Two sensors (closer/S) are required for each unit and extension cables are available as an option. This attachment kit needs to be ordered optionally as an accessory. For sensor cables, note the minimum permissible bending radii. These are generally 35 mm.

Inductive Proximity Switches

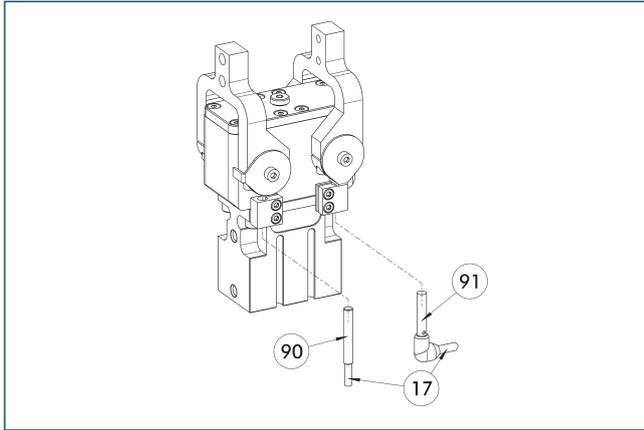


- ①⑦ Cable outlet
- ①⑨ Sensor IN..-SA
- ①⑩ Sensor IN ...

Directly mounted end position monitoring.

Description	ID	Often combined
Inductive Proximity Switches		
IN 40-S-M12	0301574	
IN 40-S-M8	0301474	●
INK 40-S	0301555	
Inductive proximity switch with lateral outlet		
IN 40-S-M12-SA	0301577	
IN 40-S-M8-SA	0301473	●
INK 40-S-SA	0301565	
Cable extension		
KV BG12-SG12 3P-0030-PNP	0301999	
KV BG12-SG12 3P-0060-PNP	0301998	
KV BW08-SG08 3P-0030-PNP	0301495	
KV BW08-SG08 3P-0100-PNP	0301496	
KV BW08-SG08 3P-0200-PNP	0301497	●
KV BW12-SG12 3P-0030-PNP	0301595	
KV BW12-SG12 3P-0100-PNP	0301596	
KV BW12-SG12 3P-0200-PNP	0301597	
clip for plug/socket		
CLI-M12	0301464	
CLI-M8	0301463	
Connection cables		
KA BG08-L 3P-0300-PNP	0301622	●
KA BG08-L 3P-0500-PNP	0301623	
KA BG12-L 3P-0500-PNP	30016369	
KA BW08-L 3P-0300-PNP	0301594	
KA BW08-L 3P-0500-PNP	0301502	
KA BW12-L 3P-0300-PNP	0301503	
KA BW12-L 3P-0500-PNP	0301507	
Sensor distributor		
V2-M12	0301776	●
V2-M8	0301775	●
V4-M12	0301747	
V4-M8	0301746	
V8-M12	0301752	
V8-M8	0301751	

- ① Two sensors (closer/S) are required for each unit and extension cables are available as an option. For sensor cables, note the minimum permissible bending radii. These are generally 35 mm.

Electronic magnetic switches MMS

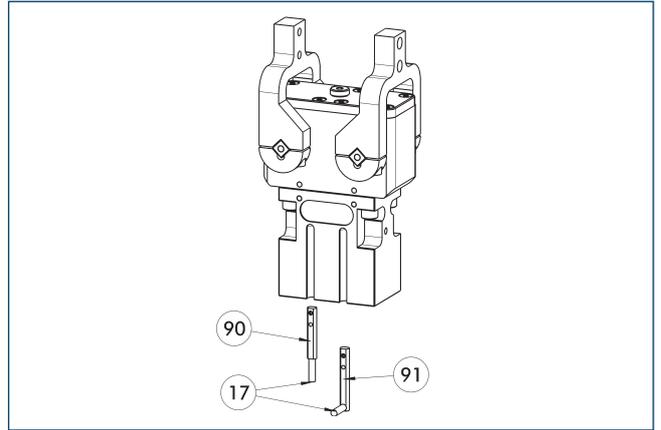

- ①⑦ Cable outlet
- ①⑨ Sensor MMS 22...-SA
- ①⑩ Sensor MMS 22..

End position monitoring for mounting in the C-slot.

Description	ID	Often combined
Electronic magnetic switches MMS		
MMS 22-S-M8-PNP	0301032	●
MMSK 22-S-PNP	0301034	
MMS electronic magnetic switches with lateral outlet		
MMS 22-S-M8-PNP-SA	0301042	●
MMSK 22-S-PNP-SA	0301044	
Cable extension		
KV BW08-SG08 3P-0030-PNP	0301495	
KV BW08-SG08 3P-0100-PNP	0301496	
KV BW08-SG08 3P-0200-PNP	0301497	●
clip for plug/socket		
CLI-M8	0301463	
Connection cables		
KA BG08-L 3P-0300-PNP	0301622	●
KA BG08-L 3P-0500-PNP	0301623	
KA BW08-L 3P-0300-PNP	0301594	
KA BW08-L 3P-0500-PNP	0301502	
Sensor distributor		
V2-M8	0301775	●
V4-M8	0301746	
V8-M8	0301751	


- ① Two sensors (closer/S) are required for each unit and extension cables are available as an option. For sensor cables, note the minimum permissible bending radii. These are generally 35 mm.

DRG 80


Radial gripper




Gripping force, O.D. gripping

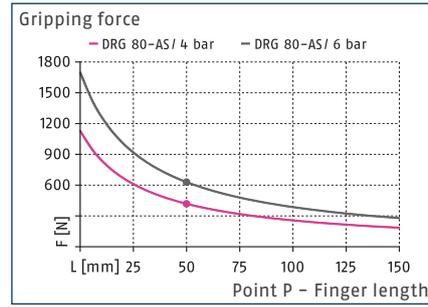

Closing torque curve**

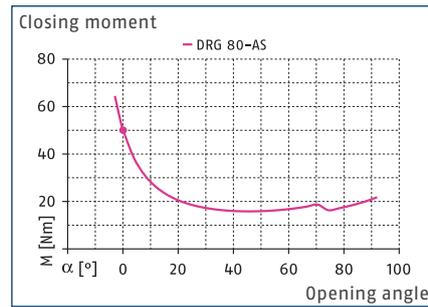

Finger load

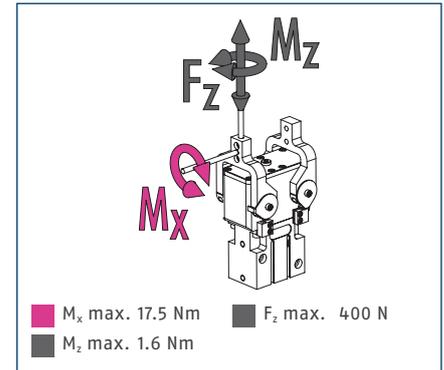

① The indicated torques and forces are static values, apply for each base jaw, and may occur simultaneously.


Technical data

Description		DRG 80-90-AS
ID		0307109
Opening angle per jaw	[°]	90
Closed angle per jaw up to	[°]	1.5
Closing moment	[Nm]	50
Closing moment generated by spring	[Nm]	8.1
Weight	[kg]	2
Recommended workpiece weight	[kg]	3.2
Fluid consumption double stroke	[cm ³]	110
Min./max. operating pressure	[bar]	4/6.5
Nominal operating pressure	[bar]	6
Closing/opening time	[s]	0.5/0.6
Closing time with spring only	[s]	0.70
Max. permissible finger length	[mm]	100
Max. permissible mass per finger	[kg]	0.5
Protection class IP		67
Min./max. ambient temperature	[°C]	5/90
Repeat accuracy	[mm]	0.1
Options and their characteristics		
High-temperature version		39307109
Min./max. ambient temperature	[°C]	5/130

① The opening angle of the base jaws can be limited.

**The diagramm is valid for all opening angle variants.

Main view

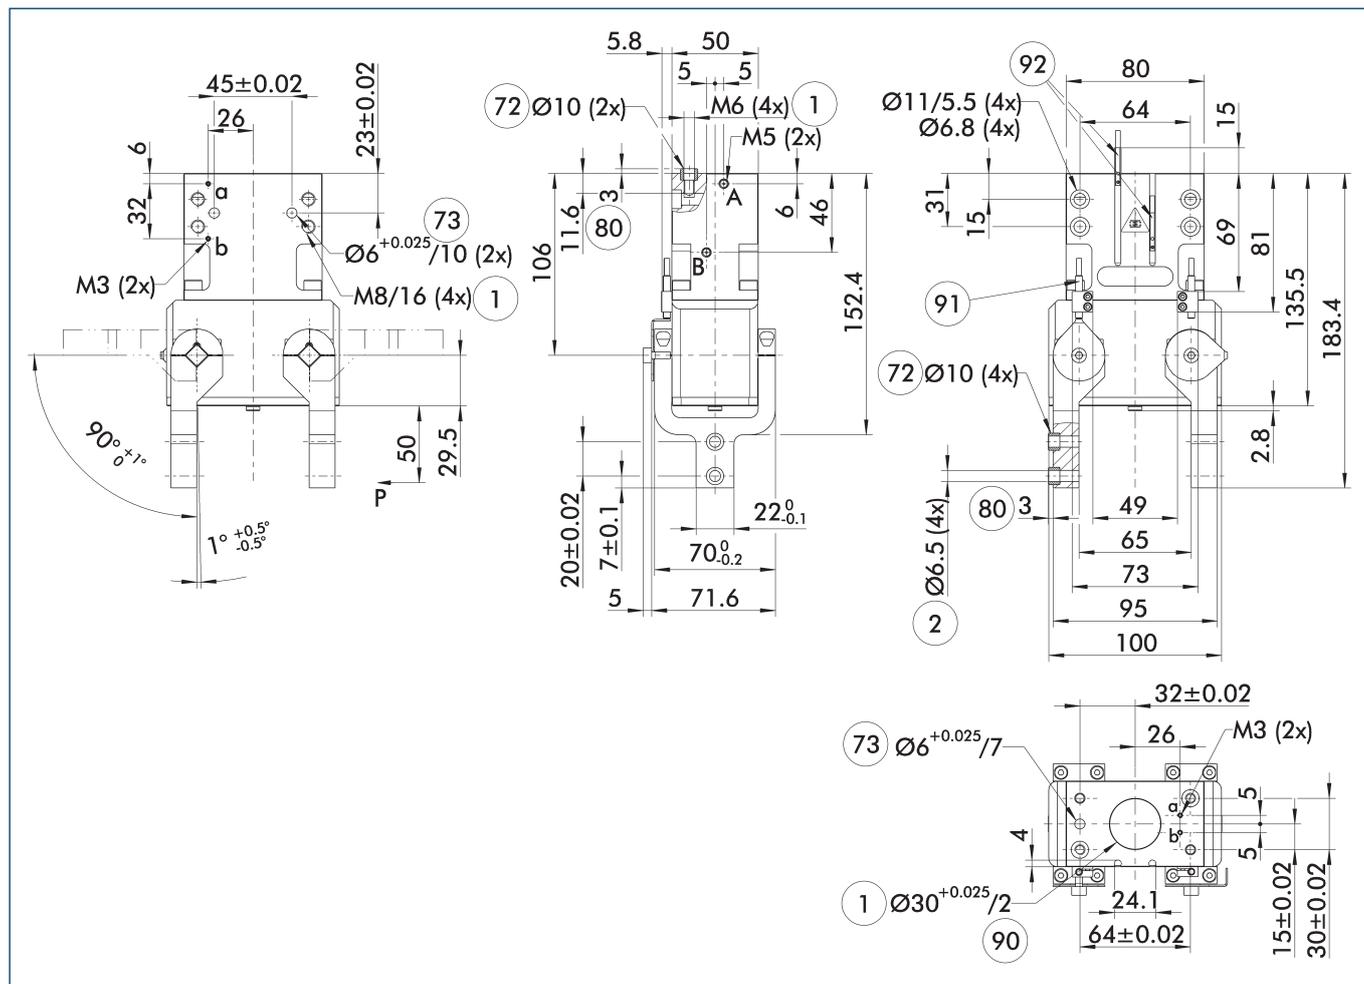

The drawing shows the gripper in the basic version with closed jaws, without dimensional consideration of the options described below.



① The SDV-P pressure maintenance valve can be used as a gripping force maintenance device (see catalog section on accessories).

- A, a Main / direct connection, gripper opening
- B, a Main / direct connection, gripper closing
- ① Gripper connection
- ② Finger connection
- ⑦ Fit for centering sleeves
- ⑦③ Fit for centering pins
- ⑧① Depth of the centering sleeve hole in the counter part
- ⑨① Depth of centering collar
- ⑨① Sensor IN ...
- ⑨② Sensor MMS 22..

DRG 80

Radial gripper


Maximum permitted finger projection

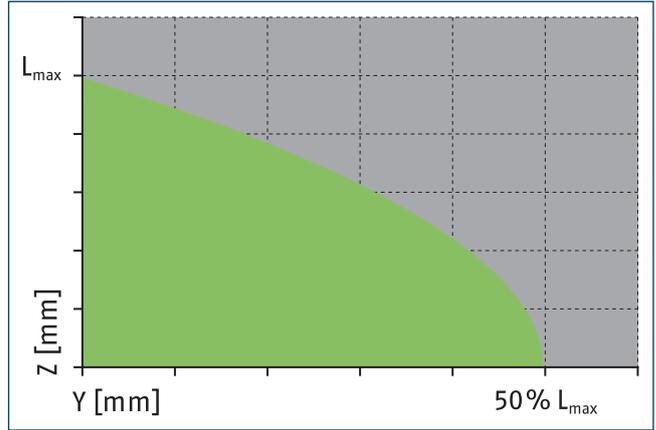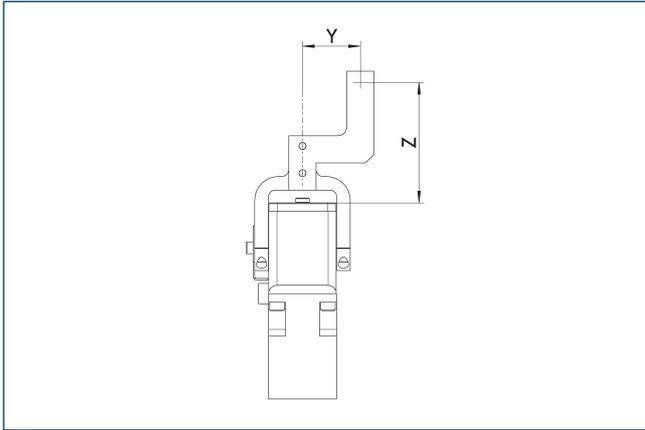

■ Permitted range ■ Inadmissible range

L_{max} is equivalent to the maximum permitted finger length, see the technical data table

Hose-free direct connection M3

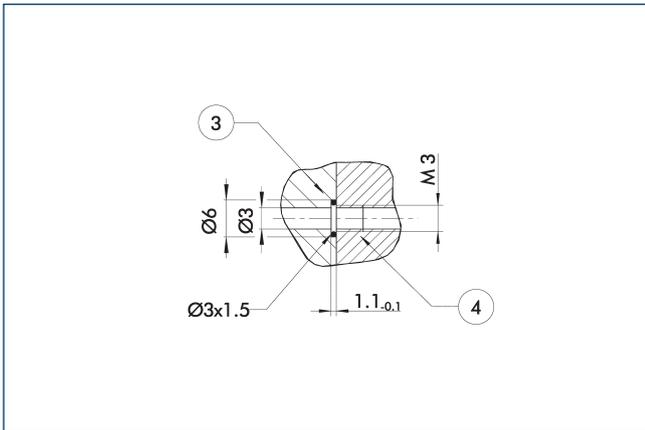


③ Adapter

④ Grippers

The direct connection is used for supplying compressed air without hoses. Instead, the pressure medium is fed through bore-holes in the mounting plate.

SDV-P pressure maintenance valve

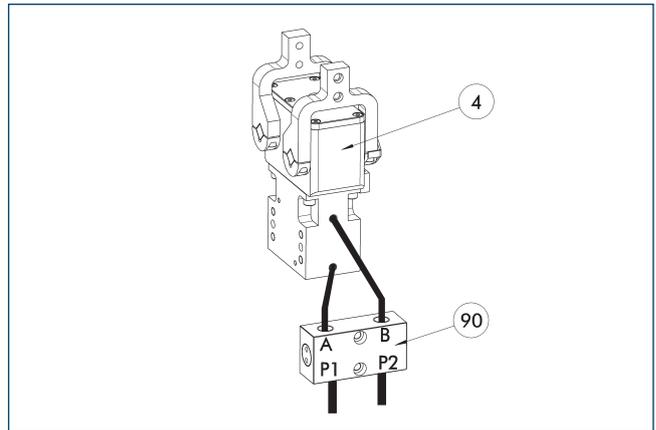


④ Grippers

⑨ SDV-P pressure maintenance valve

The SDV-P pressure maintenance valve ensures in emergency STOP situations that the pressure in the piston chamber of pneumatic gripper, swivel, linear, and quick-change modules is temporarily maintained.

Description	ID
Pressure maintenance valve	
SDV-P 04	0403130
Pressure maintenance valve with air bleed screw	
SDV-P 04-E	0300120

Attachment kit for proximity switch

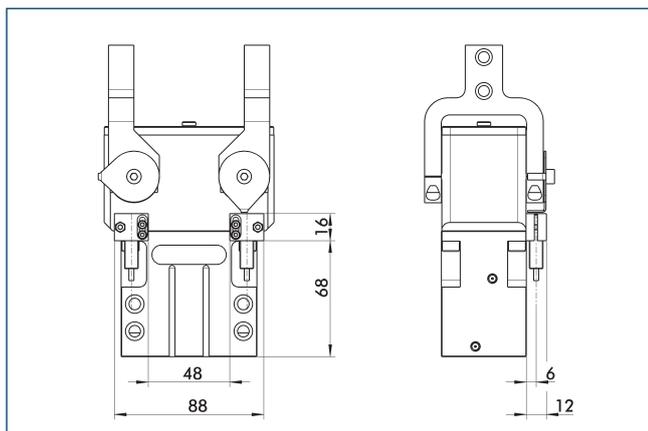


The attachment kit consists of brackets and the appropriate fastening materials. The proximity switches must be ordered separately.

Description	ID
Attachment kit for proximity switch	
AS-DRG-44-80	0304131

① This attachment kit needs to be ordered optionally as an accessory.

Inductive Proximity Switches

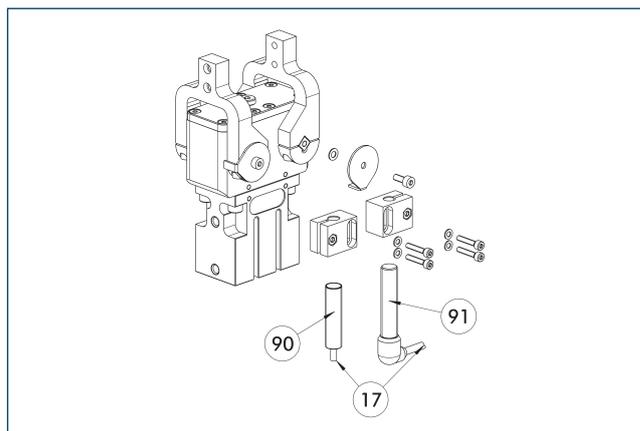


- ①⑦ Cable outlet
- ①⑨ Sensor IN ...
- ①⑨ Sensor IN...-SA

End position monitoring can be mounted with an attachment kit.

Description	ID	Often combined
Attachment kit for proximity switch		
AS-DRG-44-80	0304131	
Inductive Proximity Switches		
IN 80-S-M12	0301578	
IN 80-S-M8	0301478	●
INK 80-S	0301550	
Inductive proximity switch with lateral outlet		
IN 80-S-M12-SA	0301587	
IN 80-S-M8-SA	0301483	●
INK 80-S-SA	0301566	

① Two sensors (closer/S) are required for each unit and extension cables are available as an option. This attachment kit needs to be ordered optionally as an accessory. For sensor cables, note the minimum permissible bending radii. These are generally 35 mm.

Inductive Proximity Switches

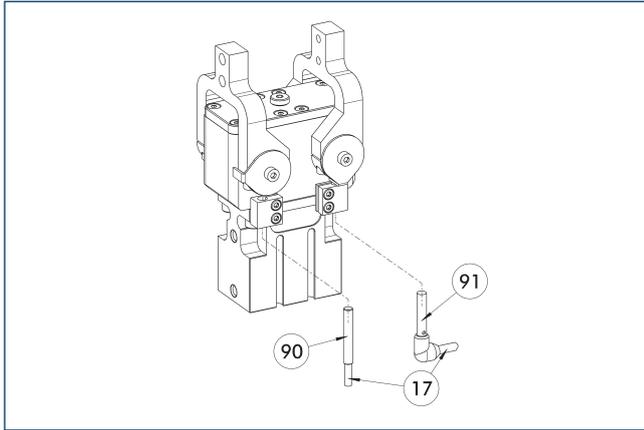

17 Cable outlet

91 Sensor IN..-SA


90 Sensor IN ...

Directly mounted end position monitoring.

Description	ID	Often combined
Inductive Proximity Switches		
IN 40-S-M12	0301574	
IN 40-S-M8	0301474	●
INK 40-S	0301555	
Inductive proximity switch with lateral outlet		
IN 40-S-M12-SA	0301577	
IN 40-S-M8-SA	0301473	●
INK 40-S-SA	0301565	
Cable extension		
KV BG12-SG12 3P-0030-PNP	0301999	
KV BG12-SG12 3P-0060-PNP	0301998	
KV BW08-SG08 3P-0030-PNP	0301495	
KV BW08-SG08 3P-0100-PNP	0301496	
KV BW08-SG08 3P-0200-PNP	0301497	●
KV BW12-SG12 3P-0030-PNP	0301595	
KV BW12-SG12 3P-0100-PNP	0301596	
KV BW12-SG12 3P-0200-PNP	0301597	
clip for plug/socket		
CLI-M12	0301464	
CLI-M8	0301463	
Connection cables		
KA BG08-L 3P-0300-PNP	0301622	●
KA BG08-L 3P-0500-PNP	0301623	
KA BG12-L 3P-0500-PNP	30016369	
KA BW08-L 3P-0300-PNP	0301594	
KA BW08-L 3P-0500-PNP	0301502	
KA BW12-L 3P-0300-PNP	0301503	
KA BW12-L 3P-0500-PNP	0301507	
Sensor distributor		
V2-M12	0301776	●
V2-M8	0301775	●
V4-M12	0301747	
V4-M8	0301746	
V8-M12	0301752	
V8-M8	0301751	

① Two sensors (closer/S) are required for each unit and extension cables are available as an option. For sensor cables, note the minimum permissible bending radii. These are generally 35 mm.

Electronic magnetic switches MMS

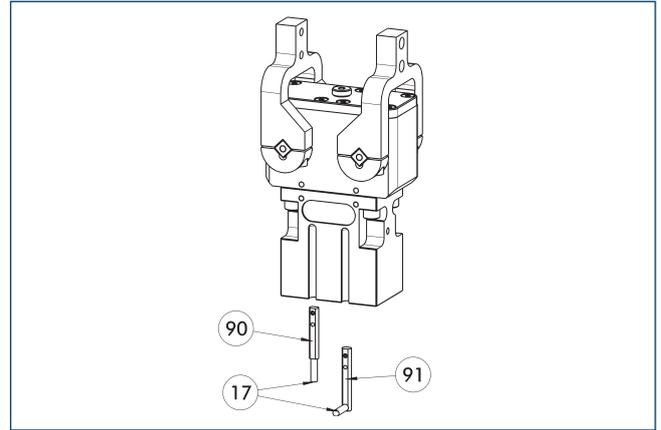

17 Cable outlet

91 Sensor MMS 22...-SA

90 Sensor MMS 22..

End position monitoring for mounting in the C-slot.

Description	ID	Often combined
Electronic magnetic switches MMS		
MMS 22-S-M8-PNP	0301032	●
MMSK 22-S-PNP	0301034	
MMS electronic magnetic switches with lateral outlet		
MMS 22-S-M8-PNP-SA	0301042	●
MMSK 22-S-PNP-SA	0301044	
Cable extension		
KV BW08-SG08 3P-0030-PNP	0301495	
KV BW08-SG08 3P-0100-PNP	0301496	
KV BW08-SG08 3P-0200-PNP	0301497	●
clip for plug/socket		
CLI-M8	0301463	
Connection cables		
KA BG08-L 3P-0300-PNP	0301622	●
KA BG08-L 3P-0500-PNP	0301623	
KA BW08-L 3P-0300-PNP	0301594	
KA BW08-L 3P-0500-PNP	0301502	
Sensor distributor		
V2-M8	0301775	●
V4-M8	0301746	
V8-M8	0301751	


① Two sensors (closer/S) are required for each unit and extension cables are available as an option. For sensor cables, note the minimum permissible bending radii. These are generally 35 mm.

DRG 100


Radial gripper




Gripping force, O.D. gripping

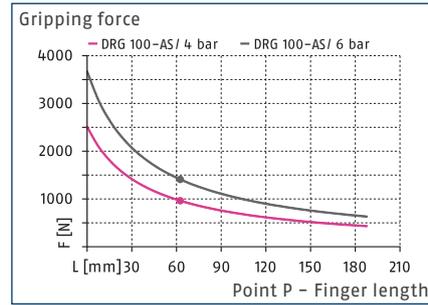

Closing torque curve**

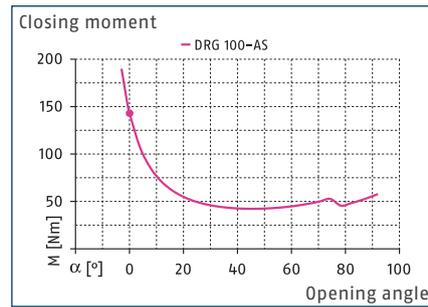

Finger load

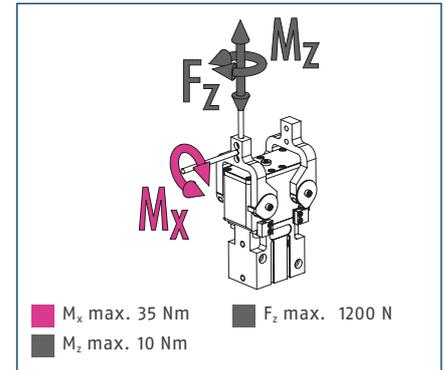

① The indicated torques and forces are static values, apply for each base jaw, and may occur simultaneously.


Technical data

Description		DRG 100-90-AS
ID		0307110
Opening angle per jaw	[°]	90
Closed angle per jaw up to	[°]	1.5
Closing moment	[Nm]	144.4
Closing moment generated by spring	[Nm]	30
Weight	[kg]	4.46
Recommended workpiece weight	[kg]	7.2
Fluid consumption double stroke	[cm ³]	217
Min./max. operating pressure	[bar]	4/6.5
Nominal operating pressure	[bar]	6
Closing/opening time	[s]	0.3/0.6
Closing time with spring only	[s]	0.75
Max. permissible finger length	[mm]	125
Max. permissible mass per finger	[kg]	1
Protection class IP		67
Min./max. ambient temperature	[°C]	5/90
Repeat accuracy	[mm]	0.1
Options and their characteristics		
High-temperature version		39307110
Min./max. ambient temperature	[°C]	5/130

① The opening angle of the base jaws can be limited.

**The diagramm is valid for all opening angle variants.

Main view

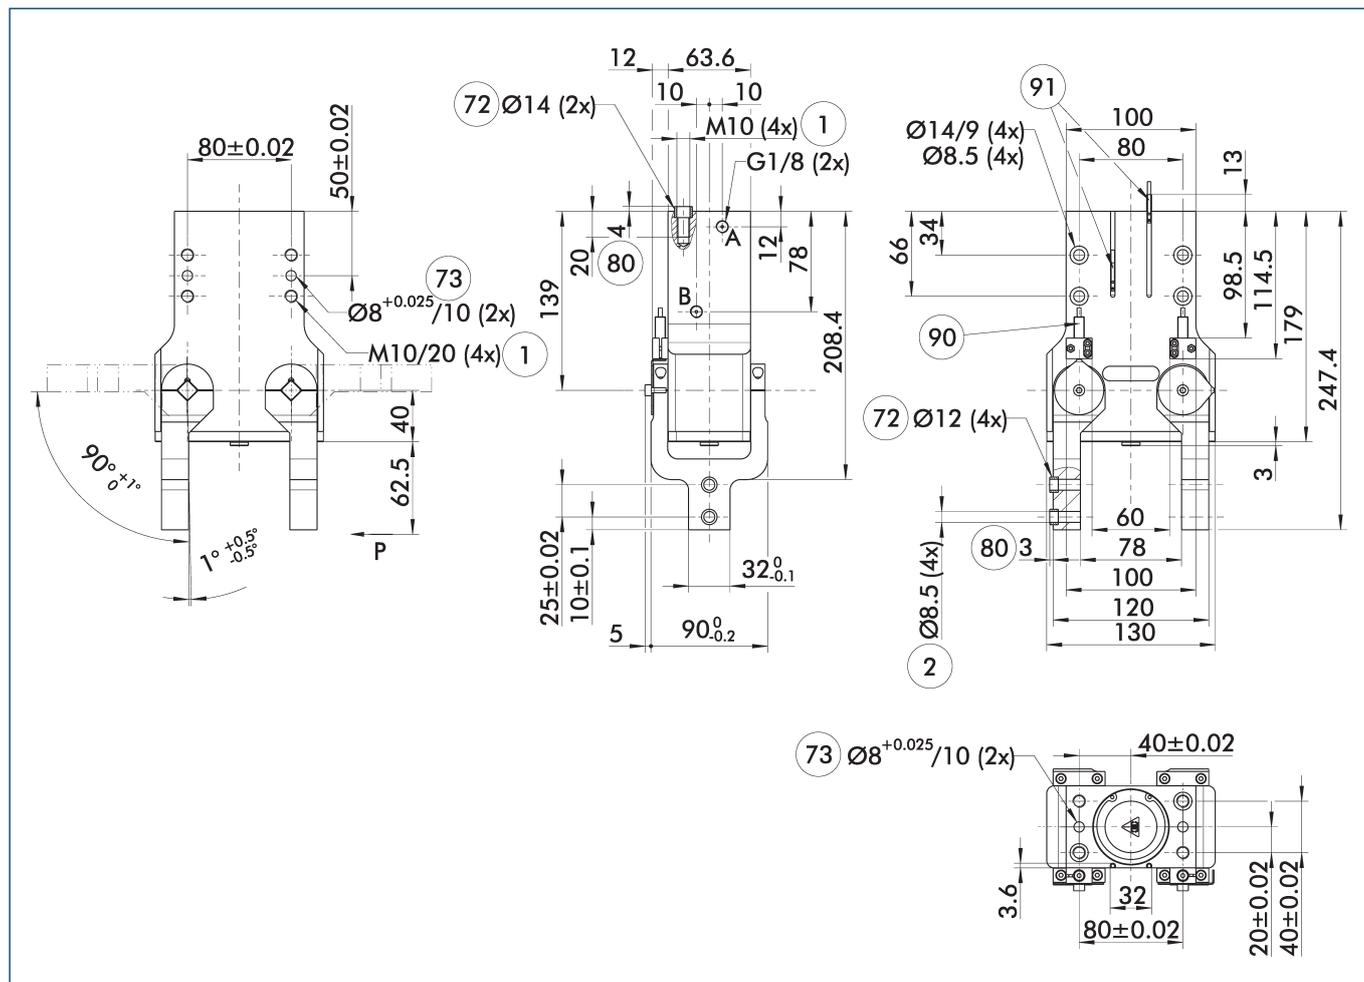

The drawing shows the gripper in the basic version with closed jaws, without dimensional consideration of the options described below.

① The SDV-P pressure maintenance valve can be used as a gripping force maintenance device (see catalog section on accessories).

A, a Main / direct connection, gripper opening

B, b Main / direct connection, gripper closing

① Gripper connection

② Finger connection

⑦② Fit for centering sleeves



⑦③ Fit for centering pins

⑧① Depth of the centering sleeve hole in the counter part

⑨① Sensor IN ...

⑨② Sensor MMS 22..

Maximum permitted finger projection

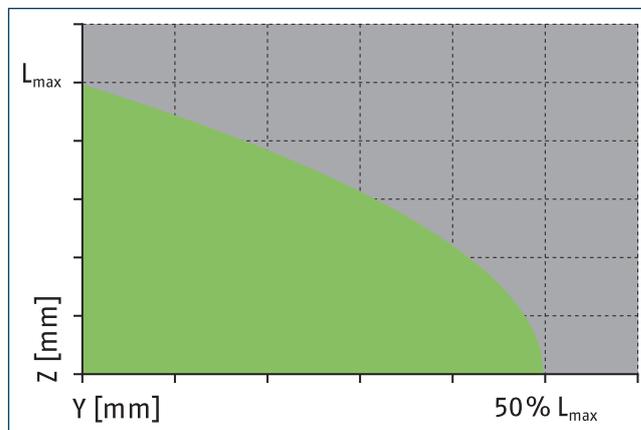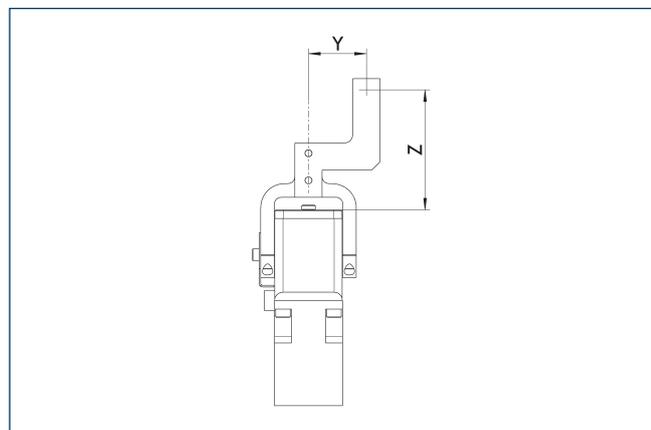


■ Permitted range

■ Inadmissible range

L_{max} is equivalent to the maximum permitted finger length, see the technical data table

SDV-P pressure maintenance valve

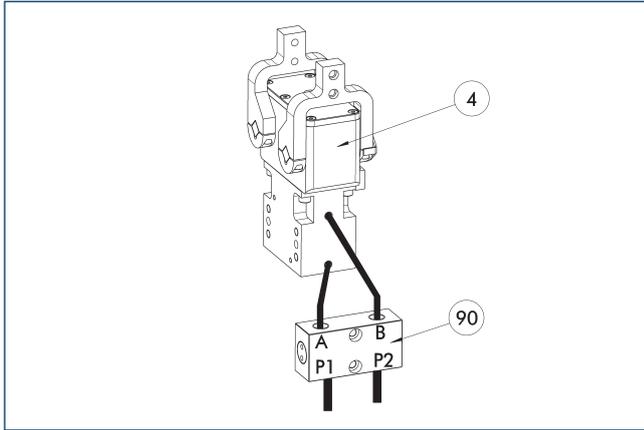


④ Grippers

⑨⑩ SDV-P pressure maintenance valve

The SDV-P pressure maintenance valve ensures in emergency STOP situations that the pressure in the piston chamber of pneumatic gripper, swivel, linear, and quick-change modules is temporarily maintained.

Description	ID
Pressure maintenance valve	
SDV-P 04	0403130
Pressure maintenance valve with air bleed screw	
SDV-P 04-E	0300120

Inductive Proximity Switches

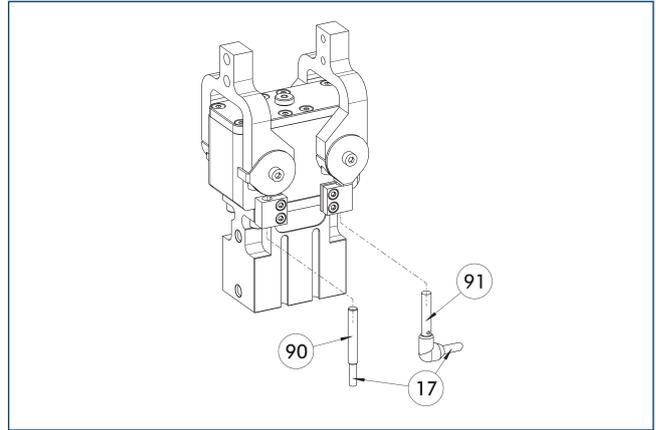

⑰ Cable outlet

⑨① Sensor IN...-SA


⑨⑩ Sensor IN ...

Directly mounted end position monitoring.

Description	ID	Often combined
Inductive Proximity Switches		
IN 80-S-M12	0301578	
IN 80-S-M8	0301478	●
INK 80-S	0301550	
Inductive proximity switch with lateral outlet		
IN 80-S-M12-SA	0301587	
IN 80-S-M8-SA	0301483	●
INK 80-S-SA	0301566	
Cable extension		
KV BG12-SG12 3P-0030-PNP	0301999	
KV BG12-SG12 3P-0060-PNP	0301998	
KV BW08-SG08 3P-0030-PNP	0301495	
KV BW08-SG08 3P-0100-PNP	0301496	
KV BW08-SG08 3P-0200-PNP	0301497	●
KV BW12-SG12 3P-0030-PNP	0301595	
KV BW12-SG12 3P-0100-PNP	0301596	
KV BW12-SG12 3P-0200-PNP	0301597	
clip for plug/socket		
CLI-M12	0301464	
CLI-M8	0301463	
Connection cables		
KA BG08-L 3P-0300-PNP	0301622	●
KA BG08-L 3P-0500-PNP	0301623	
KA BG12-L 3P-0500-PNP	30016369	
KA BW08-L 3P-0300-PNP	0301594	
KA BW08-L 3P-0500-PNP	0301502	
KA BW12-L 3P-0300-PNP	0301503	
KA BW12-L 3P-0500-PNP	0301507	
Sensor distributor		
V2-M12	0301776	●
V2-M8	0301775	●
V4-M12	0301747	
V4-M8	0301746	
V8-M12	0301752	
V8-M8	0301751	

① Two sensors (closer/S) are required for each unit and extension cables are available as an option. For sensor cables, note the minimum permissible bending radii. These are generally 35 mm.

Electronic magnetic switches MMS

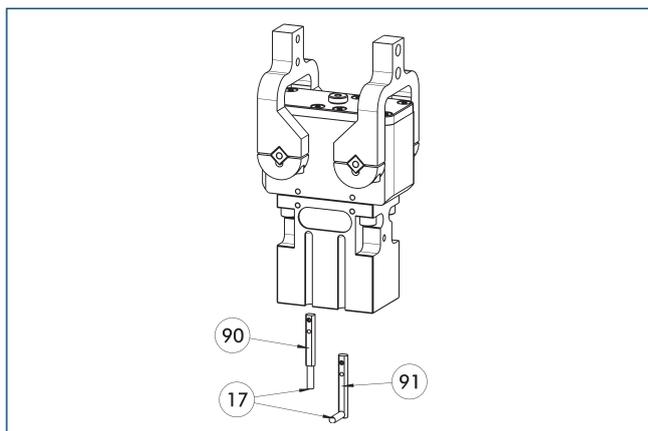

- ⑰ Cable outlet ⑨① Sensor MMS 22...-SA
 ⑨① Sensor MMS 22..

End position monitoring for mounting in the C-slot.

Description	ID	Often combined
Electronic magnetic switches MMS		
MMS 22-S-M8-PNP	0301032	●
MMSK 22-S-PNP	0301034	
MMS electronic magnetic switches with lateral outlet		
MMS 22-S-M8-PNP-SA	0301042	●
MMSK 22-S-PNP-SA	0301044	
Cable extension		
KV BW08-SG08 3P-0030-PNP	0301495	
KV BW08-SG08 3P-0100-PNP	0301496	
KV BW08-SG08 3P-0200-PNP	0301497	●
clip for plug/socket		
CLI-M8	0301463	
Connection cables		
KA BG08-L 3P-0300-PNP	0301622	●
KA BG08-L 3P-0500-PNP	0301623	
KA BW08-L 3P-0300-PNP	0301594	
KA BW08-L 3P-0500-PNP	0301502	
Sensor distributor		
V2-M8	0301775	●
V4-M8	0301746	
V8-M8	0301751	

- ① Two sensors (closer/S) are required for each unit and extension cables are available as an option. For sensor cables, note the minimum permissible bending radii. These are generally 35 mm.

SCHUNK GmbH & Co. KG
Spann- und Greiftechnik

Bahnhofstr. 106 - 134
D-74348 Lauffen/Neckar
Tel. +49-7133-103-0
Fax +49-7133-103-2239
info@de.schunk.com
www.schunk.com

Folgen Sie uns



J. Lehmann

Jens Lehmann, German goalkeeper legend, SCHUNK brand ambassador since 2012 for safe, precise gripping and holding.
schunk.com/Lehmann